



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Mobile Hydraulics

Innovative Products and System Solutions



ENGINEERING YOUR SUCCESS.



WARNING - USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributor. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale," available at www.parker.com/salesterms/.





Table of Contents

Introduction

| | |
|---------------------------------------|---|
| Parker Hydraulics..... | 2 |
| Value-added Service and Support | 3 |
| Mobile Hydraulic Components..... | 6 |
| Electronic Control Systems | 8 |

Products

| | |
|---|----|
| Accumulators | 10 |
| Compact Hydraulics | 12 |
| Cylinders | 13 |
| Electronic Control Systems | 16 |
| Filtration | |
| Filters, Elements, Systems and Accessories..... | 20 |
| Condition Monitoring Equipment | 22 |
| Fluid Connectors | |
| Rubber Hose Products | 24 |
| Thermoplastic Products..... | 25 |
| Brass and Composite Products | 26 |
| Quick Couplings..... | 28 |
| Tube Fittings..... | 30 |
| Hydrostatic Transmissions & Steering Units | 32 |
| Motors | |
| Low Speed High Torque | 34 |
| Fixed Displacement Low Speed High Torque | 35 |
| Variable Displacement Axial Piston | 38 |
| Fixed Displacement Bent Axis Piston | 39 |
| High Speed | 40 |
| Calzoni Radial Piston..... | 41 |
| Vane..... | 43 |
| Power Take-offs (PTOs) | 44 |
| Pumps | |
| Piston | 51 |
| Vane..... | 55 |
| Hybrid/Piston/Cartridge | 57 |
| Pumps/Motors | 58 |
| Rotary Actuators | 64 |
| Valves | |
| Open-Center Directional Control | 66 |
| Load-Sense Directional Control | 67 |
| Hydraulic | 68 |
| Remote Control Systems..... | 76 |
| Threaded Cartridge | 77 |
| Integrated Hydraulic Circuits | 79 |

Parker Hannifin Corporation

Parker Hannifin is the world's leading diversified manufacturer of motion and control technologies and systems, providing precision-engineered solutions for a wide variety of commercial, mobile, industrial and aerospace markets. Parker's products are vital to virtually everything that moves or requires motion control, including the manufacture and processing of raw materials, durable goods, infrastructure development and all forms of transport.

Customers rely on Parker for engineering excellence, world-class manufacturing and outstanding customer service to provide comprehensive application solutions. As the leader in motion and control technologies, Parker partners with its customers to increase their productivity and profitability.

Parker Hydraulics

Parker serves the critical needs of humanity by providing customers around the world with efficient, intelligent, power-dense hydraulic systems and value-added solutions. Taking the time to understand the needs of its customers empowers employees to develop cutting edge solutions.

Customers expect innovative, high-quality products with short lead times and excellent global service and support. Parker delivers operational excellence while leveraging its total capabilities and minimizing its impact on the environment to promote sustainability. No matter what the need, Parker is a single-source provider of all hydraulics motion and control solutions.

Global Mobile Systems Engineering

Motion Control Technology Centers

Strategically located around the world, Parker's uniquely equipped Motion Control and Technology Centers are staffed with application and systems engineers who work with vehicle design teams to develop and refine functional subsystems and complete-vehicle motion and control systems on all types of mobile equipment. Parker engineers design solutions to help customers optimize engine efficiency, extend engine life and meet emission standards. Applications include cooling, steering, braking, implement control, suspension, drive and propel and intelligent and computer-based mobile systems.



Custom Made Partnerships

Customer partnerships are cultivated and industry leading systems are developed and validated in these locations. These relationships are cultivated by listening closely to customers and repeatedly providing measurable value. Voice of the customer programs, market knowledge and engineering expertise combine

to develop new products that meet evolving customer needs. Parker uses a staged product innovation process, Winnovation, which starts with brainstorming product ideas and continues through product launch. Customers also benefit from Parker's lean thinking and six sigma analysis applied during this process. In the end, Parker solutions provide customers with a competitive advantage.

Parker Motion Control Technology Centers



Off-Highway and On-Highway Mobile Markets Served

- Aerial devices
- Agriculture
- Construction
- Defense
- Forestry
- Material handling
- Mining and drilling
- Turf care
- Waste handling
- Transportation



Mobile Technology Centers

Parker's ultimate competitive advantage in serving customers is its global network of 13,000 distributors that can provide Parker products and services nearly anywhere, anytime. At the core of Parker's hydraulic distribution is a select group of Mobile Technology Centers (MTC). MTCs are Parker distributors who offer a one-stop shop for a wide range of products, engineering

services, computer-aided design, fabrication and assembly. MTCs can assist with mobile equipment design, prototyping and the integration of electronic controls.

Parker's MTCs are chosen because of their commitment to providing exceptional customer service and complete hydraulic systems and solutions. MTCs carry local inventory of Parker products, ensuring customers fast delivery and reduced downtime.



Training Excellence

Parker's Motion and Control Training Department offers a full range of training equipment and curriculum to support the teaching of hydraulic and electromechanical motion and control technologies. Used by colleges, universities, technical schools and industry around the world, Parker training systems, textbooks, lab manuals, instructor's guides and teaching aids have been educating technology students for decades.

Value-Added Service & Support

It takes more than innovative products, competitive prices and on-time delivery to satisfy customer needs – it takes a commitment to provide exceptional value. Value is the result of personal interaction and dedicated resources.

Parker value-added services include:

- Design engineering support
- System design and prototyping
- Component selection
- New product development
- Product service centers
- Custom component manufacturing
- Assemblies and kits
- Sub systems
- Global support and service
- Technical training
- Parker Tracking System (PTS) interactive applications

When it comes to hydraulics in the mobile market, Parker's worldwide network of degreed field sales engineers are the best trained in the business and can be a customer's single-point of contact. Parker's vast global resources coupled with its platform and technology experts to satisfy any mobile application.



Mobile Hydraulic Components

Parker offers the world's most extensive line of hydraulic products for use in all types of mobile equipment. From pumps and valves to motors and motion controllers, all products share a common heritage of advanced technology and are designed to deliver precise and reliable control.

Accumulators

A complete range of accumulators including piston, bladder and diaphragm type as well as gas bottles, Kleenvent reservoir isolators and other accessories are available. Sturdy construction makes for reliable components that improve hydraulic system efficiency by maintaining pressure, supplementing pump flow and absorbing system shocks.

Compact Power Systems

Efficient performance in a robust compact design best describes Parker's Oildyne products. These compact power systems deliver power density, are easy to install and allow for flexibility across a wide variety of applications. Locking circuit and manual release availability enable safe, secure operation in

critical situations and harsh environments as well as an extended service life dramatically lowers maintenance requirements and costs. Electro-hydraulic actuators, miniature power units, fluid power systems, piston pumps, cartridge piston pumps and hand pumps are all reliable solutions for design challenges.

Coolers

Parker offers hydraulic oil and engine coolers with compact, rugged designs built for arduous mobile applications. Its designs benefit OEMs with lighter weight units while maximizing cooling capacity and lower pressure drop. Benefits to end users include low noise operation and low service/maintenance costs over the life of the cooler. Custom combination coolers

are available for most applications. Design engineers will work to meet unique cooling needs.

Cylinders

The cylinder product offering provides more power per pound and per dollar over millions of trouble-free cycles. These products have proven to be the most reliable and cost effective cylinders available.

Filtration, Monitoring and Analysis

Complementing the reliability of hydraulic systems and components are filtration products which provide protection against fluid contaminants. High, medium and low pressure filters are offered, as well as portable filter carts and replacement elements. The comprehensive line of pressure and return line filters enhances machine life and reduces machine maintenance.



Fluid Connectors

A complete spectrum of fluid connector products for hydraulic, pneumatic and fluid systems is available with products ranging from state-of-the-art fittings, valves and quick couplings, to pressure hose that is available in a wide range of core-tube materials, reinforcement designs and outer covers.

Hydrostatic Steering Units

A full line of hydrostatic steering units for a wide range of off-road equipment applications is available. These rugged components are designed to withstand system contaminants and engineered to handle higher oil pressure and temperatures than competitive products. A choice of sizes is offered in open-center, closed-center and load-sense configurations.

Cartridge Valves and Integrated Circuits

Solutions for complex circuits by matching threaded cartridge valves and integrating them into a single manifold is a core competency.

Motors

A broad range of high and low speed motors deliver excellent performance with high efficiency, true wear compensation and longer service life. Parker's motors provide power ranging up to 15,000 inch-pounds of torque with speeds ranging from $\frac{1}{2}$ RPM (Calzoni) to 13,000 RPM (bent access). A complete range of sizes is offered in gear, gerotor, vane and piston style operating configurations. Fixed and variable displacement motors are available.

Power Take-Offs (PTOs)

Chelsea® Auxiliary Power Systems products are known for high level performance and reliability. Chelsea® Power Take-offs were first introduced in 1945 and offer the broadest coverage in the industry.

Pumps

Hydraulic pumps are available in fixed or variable displacement models of piston, vane and gear pumps. Engineered to handle a wide range of applications, they are available with a full complement of electronic and computer controls.

Hydraulic pumps are manufactured with the finest materials under strict quality control resulting in a pump that delivers high efficiency and low maintenance under the toughest operating conditions.

Rotary Actuators

Recognized for their durability and used wherever reliability is critical to the application, rotary actuation provides performance features to meet all common mobile applications. The product range offers a unique solution for developing high torque from a compact, self-contained, precision machined, drop-in package. Special designs are available.

Valves and Controls

From simple on/off functions to precise motion control, valves and controls are used on all types of mobile equipment. Inline and bankable control valves, motion controllers, pressure control valves, servo valves and manifold mounted directional and proportional valves are all available.



Electronic Control Systems

Parker's integrated system solutions increase productivity and reduce energy consumption with a full spectrum of products including control modules, displays, sensors and electromechanical devices. The line includes standard and custom designed components to meet a variety of different customer needs.

Electronic control systems offer many benefits: cost savings in diagnostic capabilities, speed of application development, ease of operation and improved functionality. They are extremely flexible, can support multiple languages and can be branded with custom overlays. System experts can assist customers in writing specifications, selecting components, developing applications and performing system integration.





Rugged Hardware

Parker hardware is tested for robust operation and compatibility with mobile equipment. A wide range is available, both standard and custom, and designed to interface with mobile communication protocols. Hardware is tested to industry and government standards for operation in severe conditions including vibration, extreme temperatures, mechanical impact or electromagnetic interference.



Simple Software

Software from Parker enhances manufacturers' ability to quickly develop systems, reducing time and expense. Simple software ensures the ability to design customized applications without having advanced programming skills. A graphical programming interface and diagnostic tools aid users in simple or complex functionality.



Displays and Panels

Parker has developed many rugged displays, monitors and instrument clusters for the heavy equipment industries; all communicate with other devices using industry standard protocols. Monitors and instrument clusters are highly customizable and are used for operator information display in vehicle cabs. From basic user configurable display panels, up to shaped, cabin pillar or dash clusters for OEMs, Parker's displays and panels meet a variety of design requirements.



Controllers

A range of robust control modules offer a building-block approach that simplifies component design and installation and reduces development time and expense. Controllers meet industry and government standards for operation in severe conditions that include extremely high or low temperatures, vibrations, mechanical impact and electromagnetic interference. Programmable controllers intended for electro-hydraulic control offer OEMs the ability to optimize their machines for better productivity and efficiency.

Joysticks and Levers

All Parker joysticks and single axis levers are extremely sturdy and able to withstand aggressive conditions (EMI, vibrations and wide temperature ranges) during outdoor use and installation. The units feature a compact, ergonomic design making them ideal for armrest and panel installations.

Sensors

A full range of pressure, temperature, proximity, speed, rotary, tilt and specialty sensors are available. Advanced sensors have been introduced to help manufacturers and end users of mobile hydraulic systems improve long term operating performance while reducing overall life cycle costs. These extremely compact and lightweight sensors use proven, reliable technology. They were developed to meet the productivity and profitability needs of the mobile sector, and their features work together to make them suitable for use in many different applications, from construction and forestry, to lift trucks, to buses and commercial vehicles.

Accumulators

Piston Accumulators



- Low temperature solutions to -50°F
- Over 50 standard capacities from 5 cu. in. (.075 liters) to 50 gallons (189 liters)
- 2", 3", 4", 6", 7", 8", 9" and 12" nominal bore sizes
- 207, 276 and 350 bar (3000, 4000 and 5000 psi) operating pressures
- Industry proven five-bladed V-O-ring piston seals in five standard seal compounds
- Accumulator and gas bottle configurations
- CRN/CSA, AS1210, DNV, ABS, ASME, CE and other certifications available
- Specials up to 200 gallons and 20,000 psi
- Stainless steel models for water/seawater/chemical service

[View Specs](#)[View Product PDF](#)

ACP Series Non-Repairable Piston Accumulators



- Piston design
- 40, 50 80, 100 mm bore sizes
- Standard capacities from 5 cu. in. (.075 liters) to 488 cu. in. (8 liters)
- 276 bar (4000 psi) operating pressure

- Low-cost, non-repairable design
- Multiple port options
- No gas valve option
- Fast delivery

[View Specs](#)[View Product PDF](#)

Bladder Accumulators



- Standard capacities from 10 cu. in. (.16 liters) to 15 gallons (56 liters)
- Maximum operating pressures up to 455 bar (6600 psi)
- Bladders manufactured in-house
- Six bladder compound to suit a variety of fluids and temperatures
- Bottom and top repairable; medium and high-flow, transfer barriers and gas bottles

- Water/chemical service available
- CRN/CSA, AS1210, DNV, ABS, ASME, CE and other certifications available
- 24-hour emergency bladder kit program

[View Specs](#)[View Product PDF](#)

Accumulators

Diaphragm Accumulators



- Standard capacities from 5 cu. in. (.075 liters) to 170 cu. in. (2.8 liters)
- Maximum operating pressures up to 250 bar (3600 psi)
- Compact and lightweight

[View Specs](#)[View Product PDF](#)

- Low-cost, non-repairable design
- Quick responding diaphragms of nitrile or hydri

Inline Pulse-Tone™ Shock Suppressors



- Reduces pulsations and shock
- Compact size, inline mounting
- 207 and 345 bar (3000 and 5000 psi) models

- NPT, BSPP, SAE and split flange connections
- Stainless steel model for water/chemical service

[View Specs](#)[View Product PDF](#)

Accumulator Charging Kit and Mounting Accessories



- Charging and gauging equipment
- Gauge adapters and assemblies
- Unloading valves
- Mounting clamps and base brackets

- U-Bolt mounting hardware
- Accumulator repair tools

[View Specs](#)[View Product PDF](#)

Hydraulic Oil and Engine Coolers



- Parker coolers offer compact design resulting in lighter weight units with higher cooling capacity and lower pressure drop
- Ruggedly designed for arduous, mobile applications; Low service and maintenance costs
- Optimized fan design and material for low noise operation

- Available with DC Motor (12V/24V) or Hydraulic Motor (displacement from 8.4 cc/rev to 25.2 cc/rev)
- Cooling capacity up to 40 HP (DC Motor) and 215 HP (Hyd Motor)
- Design engineers work with customers to provide custom combination coolers to meet unique cooling needs of most applications

[View Product PDF](#)

Compact Hydraulics

108 Series



- AC or DC motor
- 4 pump sizes: up to 2.8 LPM (.75 GPM)
- Single or bidirectional rotation
- Adjustable relief valve(s)
- Locking check valves available on all models
- Variety of hydraulic circuits

- Reservoirs from .45 to 5.6 L (28 cu. in. to 1.5 gallons)
- 241 bar (3500 psi) capability

[View Specs](#)[View Product PDF](#)

165 Series



- .8 kW (1 HP), 12 or 24 VDC motor
- Up to 5.4 LPM (1.4 GPM)
- Variety of circuits including reversible locking

- Soft seat load hold check valves
- 241 bar (3500 psi) capability
- Many reservoir choices

[View Specs](#)[View Product PDF](#)

Compact EHA (Electro-Hydraulic Actuator)



- Compact, power dense, low noise plug and play solution
- Robust, leak free one piece housing design
- Speed range up to 84 mm/sec (3.3 in/sec)
- Force range up to 21.35 kN (4800 lbs)
- Cylinder stroke length of 102, 152 and 203 mm (4", 6" and 8")

- Variety of pump displacements, cylinder rod and bore sizes
- 12 or 24 VDC motor, .18 kW to .56 kW (1/4 to 3/4 hp) for intermittent duty
- Comes pre-flushed, filled & sealed
- Compatible with hostile environments; Can be washed down

[View Specs](#)[View Product PDF](#)

Cylinders Mobile

Cylinders



Single or double-acting telescopic cylinders and single or double-acting "rod type" mobile cylinders are available with:

- Bore sizes from 3 – 22"
- Stroke up to 1270 cm (500")
- Operating pressures up to 689 bar (10,000 psi)
- Various materials and coatings including chrome, nitriding, stainless steel and double chrome

- Typical options
 - Load holding valves
 - Flow controls and fuses
 - End of stroke cushions

Single-acting telescopic cylinders are available off the shelf or in production quantities. Design and manufacture of cylinders to customer specifications from one piece to production quantities is also available.

The standard single-acting telescopic cylinders can be used with almost any mounting setup: doghouse, bail, side frame, underbody, inverted mounts or inverted mount design.

Design Features:

- Longer sleeve overlap for stability
- External packing nuts add strength
- Beveled steel stop rings for superior strength
- High strength tubing has up to 27% greater cross-section area
- Chevron packing and self-adjusting wave springs
- Wide rod bearings and improved, longer life urethane wiper rings
- Steel pin-eye mount
- Cylinder design that allows for easy repacking and repair

[View Specs](#)

Standard Build


[View Specs](#)
[View Product PDF](#)

The Standard build cylinders offer the benefit of standard tube and rod sizes with custom design options to create a highly engineered, quality cylinder configurable to provide quick delivery. Various mounting options are available. The configurable menu provides same-day assembly drawings and same-day pricing. Bill of materials and manufacturing processes support a reduced lead time.

Seal kits are available for same day delivery for consistent quality and standardization in service needs.

Standard build cylinders are manufactured with Parker Zero Leak sealing technology which offers the following benefits:

- Additional outside diameter lip that prevents contaminates from entering the system by bypassing the O.D. of the wiper body
- Superior BTU rod seal increases the conformity of the seal to the rod; Second lip on the seal improves stability, limiting the rocking motion of the seal to reduce seepage
- Buffer ring acts as a primary seal and pressure spike suppressor; the combination of rod seal and buffer ring results in an exceptionally dry rod for longer life
- Piston includes two wear rings and bronze filled PTFE seal designed for leak-free service life
- 1045/1050 chrome plated, induction hardened, 100K yield rod is more resistant to damage to rod and seal
- 1026 DOM cylinder tube bores are skived and roller burnished to provide precision finishes for extended seal life

Advanced Cylinder Technologies

Global Shield™ Coating

[View Product PDF](#)

Global Shield™ is an advanced coating technology designed to meet the corrosion, impact, chemical, salt water and acidic resistance requirements of challenging mobile environments, while mitigating the negative environmental impact of current plating technologies.

- Cylinder corrosion resistance up to eight times longer than Engineered Hard Chrome (EHC) or Nitride
- Designed for applications with high-duty cycle and zero tolerance for downtime

- Ideally suited for mining, construction, material handling, renewable energy, power generation, refuse, oil & gas, marine/intermodal, military, heavy-duty trucking and forestry
- Reduces the downtime associated with cylinder and seal repairs and replacements
- Emissions are below OSHA Personal Exposure Limits (PEL) and are fully compliant with the European market's Restriction of Hazardous Substances (RoHS) directive

Intellinder™ Absolute Position Sensor

[View Product PDF](#)

The Intellinder™ Absolute Position Sensor is designed to eliminate the time and costs associated with gun drilling, calibration and field servicing challenges associated with other technologies. This position sensing technology integrates easily into hydraulic cylinders without any exposed external sensors or complex linkages, making it an ideal solution for challenging outdoor environments.

- Design combines highly engineered optics with a proprietary lens that provides excellent resolution, linearity, repeatability, accuracy and hysteresis
- Position-identifying bar codes on the rod are used to communicate absolute position directly and precisely to the controller. Position report occurs at power-on with no need for calibration
- Provides health monitoring which can detect malfunctions disrupting operations; multiple sensors can be mounted, allowing for redundancy in high demand applications
- Performs across a wide range of temperatures and provides long stroke capabilities of 20 feet [6,096mm] or more
- Designed to sustain performance in applications exposed to vibration, dust, gravel, corrosives, chemicals, axial load, side load and immersion
- Plug and play installation

Advanced Cylinder Technologies

Lightraulics® Composite Hydraulic Cylinders and Piston Accumulators

[View Specs](#)[View Product PDF](#)

Lightraulics® hydraulic cylinders are made from carbon fiber composites and high performance lightweight alloys. They typically weigh less than 60% of the weight of a comparable steel cylinder. Lightweight composite materials offer revolutionary benefits for machine designers, manufacturers and end users in the oil & gas, military, marine and aerospace markets.

- Carbon fiber has a lot of strength and stiffness relative to its weight, offers superior fatigue life compared to metal components and has a high corrosion and chemical resistance
- Uses a fully composite barrel instead of a metal liner
- Available for bore sizes up to 200 mm (7.9 in) and operating pressures up to 380 bar (5500 psi)
- Piston accumulators in the same design can be realized for volumes up to 13.2 gal (50 liters)
- Custom designs for individual applications are available

Electronic Control Systems

Parker's Electronic Controls Division provides products and solutions for electrical and electronic systems for mobile vehicles.

The extensive breadth and depth of products and solutions serve a diverse customer base in construction machinery, bus and RV, forestry machines, material handling, agriculture equipment and specialty trucks. The full spectrum consists of control modules, displays, sensors, instrument clusters and joysticks.

Global manufacturing and engineering locations support the complete line of custom-designed products & standard components, making the division very well suited for complete system solutions that meet the needs of mobile OEMs. The scope of the

global engineering and manufacturing resources, give Parker the ability to design and manufacture products for specific high volume OEMs, while continuing to offer an extensive line of standard and catalog products.

Full system solutions and products for the mobile equipment and truck and bus markets include:

- Programmable Controllers
- Displays
- Instrument Clusters
- Operator Input Devices
- Sensors




[IQAN Catalog HY33-1800 PDF](#)

[IQAN Catalog HY33-1825 PDF](#)

[IQAN Electronic Controls Made Easy PDF](#)

ECD control products create systems

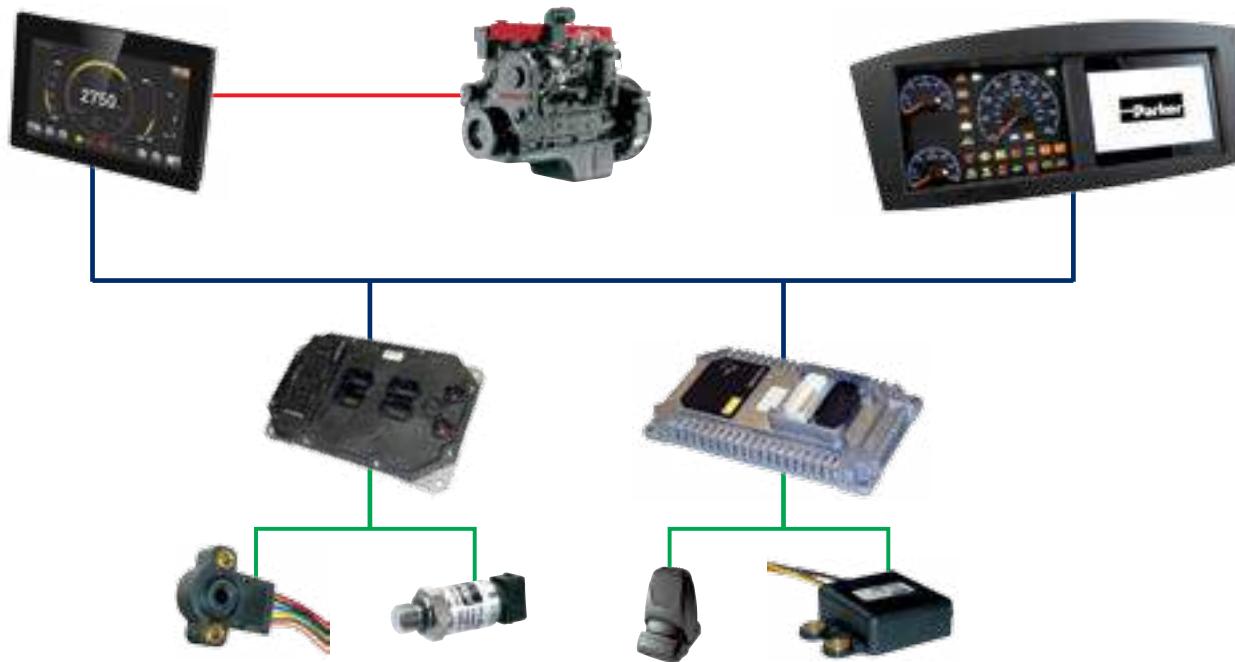

Intelligent

Product Scope and Depth Allow Full Systems Capabilities



and Innovative Solutions

Electronic Control Systems

Mobile Electronic Control Displays



| Display Types | Models |
|------------------------------------|---|
| Color TFT master display | IQAN-MD3, IQAN-MD4-5, IQAN-MD4-7, IQAN-MD4-10 |
| Color TFT display | DPS35, DPE70 |
| Instrument cluster, display, panel | DPS4/5, DPS-C, DPS70 |
| Custom | Contact Parker |

[View Specs](#)

Mobile Electronic Control Modules



| Control Module Types | Models |
|----------------------|---|
| CAN master | IQAN-MC2, IQAN-MC3, IQAN-MC31, CM0711, CM2115, CM3620, CM3626 |
| CAN expansion | IQAN-XA2, IQAN-XS2, IQAN-XT2, IQAN-XC21, CM0410, CM2904 |
| Multiplexing module | VMM0604, VMM1210, VMM1615, VMM2404, VMM3120 |
| Standalone driver | IQAN-TOC2 |
| Custom | Contact Parker |

[View Specs](#)

Electronic Control Systems

Mobile Electronic Control Joysticks and Levers



| Joysticks and Levers | Models |
|----------------------|----------------------------|
| CAN joystick | IQAN-LC5-C01 |
| Analog joystick | IQAN-LC5-X05, IQAN-LC6-X05 |
| Analog lever | IQAN-LSL |
| Analog paddle | IQAN-LST |
| Custom | Contact Parker |

[View Specs](#)

Mobile Electronic Control Sensors



| Sensor Types | Models |
|--------------|--|
| Tip, tilt | RM50, ATS50, ATS90, ACC50, ACC100, LS60, UTS |
| Rotary | RF50, RF55, RS52, RS53, RS60, RS70 |
| Proximity | FP2000, FP3000, FP4000, PS65 |
| Speed | GS50, GS60, GS70, TGSS |
| Liquid level | LF700, LF750, LF800 |
| Temperature | IQAN-ST-G-B, IQAN-ST-U-D, IQAN-ST-M-B |
| Pressure | IQAN-SP035, IQAN-SP500, SMP035, SMP500 |
| Custom | Contact Parker |

[View Specs](#)

Filtration Filters

Low Pressure


[View Specs](#)

- Various mounting configurations
- High capacity/high efficiency Microglass media
- Visual and electrical indicators with several connector styles
- Flange options for low profile, easy mounting

| Model | Max Flow LPM (GPM) | Max Pressure bar (psi) | Mounting Style |
|----------|--------------------|------------------------|-----------------|
| 12AT | 64 (17) | 10.3 (150) | Spin-on |
| 50AT | 190 (50) | 10.3 (150) | Spin-on |
| PT | 190 (50) | 10.3 (150) | Tank top |
| KLT/KLS | 455 (120) | 10.3 (150) | Tank top |
| RF7 | 1136 (300) | 10.3 (150) | Tank top |
| ILP, RFP | 452 (120) | 13.8 (200) | Inline, In-tank |
| BGTS | 2400 (640) | 10.3 (150) | Return in-tank |

[View 12AT/ 50AT PDF](#)
[View PT PDF](#)
[View KLT/KLS PDF](#)
[View RF7 PDF](#)
[View ILP/RFP PDF](#)
[View BGTS PDF](#)

Medium Pressure


[View Specs](#)

- NPT, SAE or flange ports
- High capacity/high efficiency Microglass media

- Cartridge style by-pass valve
- Visual and electrical indicators with several connector styles

| Model | Max Flow LPM (GPM) | Max Pressure bar (psi) | Mounting Style |
|-------|--------------------|------------------------|----------------|
| 12CS | 94 (25) | 34.5 (500) | Inline |
| 50CS | 220 (60) | 34.5 (500) | Inline |
| GMF2 | 94 (25) | 69 (1000) | Inline |
| GMF3 | 302 (80) | 69 (1000) | Inline |
| GMF4 | 452 (120) | 69 (1000) | Inline |

[12CS/50CS PDF](#)
[GMF PDF](#)

High Pressure


[View Specs](#)
[15P/30P PDF](#)
[50P/50PR PDF](#)
[WPF PDF](#)

- SAE, flange or ISO ports
- High capacity/high efficiency Microglass media
- Visual and electrical indicators with several connector styles
- Manifold mount option (50P and 15P/30P and WPF Series)
- Reverse flow option (50PR Series) for HST circuits

| Model | Max Flow LPM (GPM) | Max Pressure bar (psi) | Mounting Style |
|-------|--------------------|------------------------|----------------------|
| 15P | 75 (20) | 207 (3000) | Inline, manifold |
| 30P | 170 (45) | 207 (3000) | Inline, manifold |
| 50P | 377 (100) | 345 (5000) | Inline, bowl up |
| 50PR | 264 (70) | 345 (5000) | Inline, reverse flow |
| WPF1 | 40 (10) | 483 (7000) | Inline |
| WPF2 | 100 (26) | 483 (7000) | Inline |
| WPF3 | 160 (42) | 483 (7000) | Inline |
| WPF4 | 360 (95) | 483 (7000) | Inline |
| WPF5 | 520 (137) | 483 (7000) | Inline |



Filtration Elements, Systems, Accessories

Portable/Offline Systems



- Provide flexibility for removing contaminants from hydraulic fluid
- Guardian hand-held purification system with 15 LPM (4 GPM) flow rate
- Choice of five portable purification systems including 18, 37, 75, 113 and 170 LPM (5, 10, 20, 30 and 45 GPM) flow rates

[View Specs](#)
[View ParGel Product PDF](#)
[View Sentinel Product PDF](#)

- Choice of two filter carts:
 - 19 LPM (5 GPM) flow; $\frac{1}{2}$ hp electric motor
 - 39 LPM (10 GPM) flow; $\frac{3}{4}$ hp electric motor
- Par-Gel Elements
 - Water removal elements filter “free” water from mineral-base and synthetic fluids
 - Fits many Parker filters and the Guardian Filtration System

[View Guardian PDF](#)
[View Filtercart Product PDF](#)

Par Fit Elements



- Extensive range of competitively priced quality replacement filter elements for any filter brand
- Over 6500 competitive interchange listings help consolidate vendor base by allowing users to acquire all replacement elements from one source

[View Specs](#)

- Provides proven performance in competitive filter housings

Reservoir Accessories



- Metallic and non-metallic breathers and filler breathers
- Triceptor™ desiccant breathers
- Spin-on breathers

- Diffusers
- Fluid level/temperature gauges
- Suction strainers

[View Product PDF](#)

Filtration Condition Monitoring Equipment

Effective machinery and oil condition monitoring provide the end user with the ability to predict breakdown and eliminate or reduce the associated cost of failure.

An intimate knowledge of the fluid and mechanical properties of these machines can maximize pre-warning time and result in the most efficient planning of maintenance and resources for asset repair or replacement.

Parker offers one the widest ranges of accurate, reliable and innovative condition monitoring products providing solutions in:

- Detection of abnormal wear/ impending system failure
- Detection of lube degradation/ contamination

- Verification of the oil in use
- Optimization of equipment service intervals
- Improvement of operational safety
- Reduction of risk and maximization of uptime

LCM – Laser Particle Counter



The LCM laser particle counter is designed for on-line particle counting with programmable automatic operation feature and data storage for continuous monitoring.

- Particle count test cycle in 2 minutes reported in ISO or NAS format

- On-line sampling up to 414 bar (6000 psi)
- RS232 serial port with data storage capacity up to 300 tests
- Integral printer with data graphing and Windows-based software

[View Product PDF](#)

Par-Test



A complete laboratory fluid sample analysis kit for either water based fluid or petroleum based fluids. Each kit includes a pre-cleaned sample bottle, data sheet and mailing container. Standard tests are:

- Particle count
- Photomicrograph
- Viscosity analysis
- Water analysis
- Neutralization analysis

[View Specs](#)

[View Product PDF](#)

MS200 Moisture Sensor



The MS200 moisture sensor provides real-time continuous water in oil contamination monitoring.

- Simple LEDs provide local Go/No-Go indication

- Panel meter for local or remote display reports 0 – 100% saturation
- Meter scale is color coded for positive/easy identification
- 0 – 10 VDC analog and 120 VAC logic output

[View Specs](#)

IPD – iCount Particle Detector



The iCount Particle Detector represents the most innovative technology in solid particle detection. The IPD shows real time fluid condition indication in ISO or NAS format to a customer set point.

- Moisture % RH indication (optional)
- Early warning LED or LCD display indicators for low, medium and high contamination levels.

- Cost effective early warning solution which prolongs fluid life and reduces machine downtime
- Hydraulic, phosphate ester and fuel fluid compatible.
- Self-diagnostic software
- Fully PC/PLC integration, RS232 and 0-5 Volt, 4-20mA output.
- 6000 psi (414 bar) maximum operating pressure.

[View Specs](#)

[View Product PDF](#)



Filtration Condition Monitoring Equipment

ANALEXfdMplus



The ANALEXfdMplus is a highly accurate ferrous debris monitor designed to measure ferrous wear metal particle contamination in an oil sample.

- Portable
- 15 second test time
- Data storage memory
- Touch screen data entry

[View Product PDF](#)

DIGI Field Kit



The DIGI Field Test Kit gives fast, accurate results for water in oil, total base number, total acid number, insolubles (soot) and comparative viscosity.

- Portable
- TAN and TBN test
- Water in Oil test
- Viscosity go/no-go
- Combustion related debris (soot) test

[View Product PDF](#)

Low Range DIGI Water Kit



The DIGI Test Cell provides simple, accurate results for water in oil.

- Portable
- Water in oil test
- PPM or %
- Built-in memory
- 10,000 test battery life

[View Product PDF](#)

Heated Viscometer



Make fast on-site maintenance decisions with Parker's Heated Viscometer. Accurate oil viscosity results in minutes.

- Portable
- Digital read-out in Centistokes (cSt)

[View Product PDF](#)

MHC Bearing Checker



Parker's MHC Bearing Checker is a new, unique hand-held instrument, providing maintenance engineers with an easy-to-operate, simple to use and quick method of analyzing bearing condition and lubrication state.

- Portable
- Magnetic interface
- dB level display
- Digital display of bearing distress level

[View Product PDF](#)

Fluid Connectors Rubber Hose Products

Low, Medium and High Pressure

Parker offers the largest selection of hoses plus more fitting sizes and configurations than any other manufacturer. A wide variety of hoses including braided, spiral, specialty and multi-purpose and more than 4500 Parkrimp fittings are available. Parker products have been designed, tested and approved to meet and exceed global standards, including SAE, DIN, ISO, ABS, DNV, USCG among others.

Parker Parkrimp assemblies consist of No-Skive hose and fittings, permanently joined by one of the Parkrimp crimp machines. The teeth in Parker's crimped fittings "bite down" to the hose wire providing a metal-to-metal grip with maximum integrity. Parker's Monoblok™ fittings are manufactured from a single piece of steel as compared to a two-piece fitting. Their lack of brazed or soldered joints provides the maximum in leak protection, eliminating any potential leak paths. Parker Monoblok fittings are available in a wide variety of end configurations and fitting series.

Parker one-piece fittings are designed, manufactured and tested to work with its low, medium and high pressure hoses to help keep equipment up and running.

The right product is available for most applications - including hoses that feature a variety of abrasion-resistant cover choices, flexibility, a wide range of media compatibility and more - characteristics that make Parker the hose supplier of choice.



Low Pressure

Pneumatic, specialty, air-conditioning and heavy-duty truck/mobile equipment hose makes up the bulk of the low pressure market. In addition to diesel engine and return line hoses, Parker manufactures the Push-lok Plus multipurpose hose line which can be assembled in seconds without the need for clamps or bands using Parker 82 Series fittings or HY Series crimped fittings.

[View Specs](#)
[View Product PDF](#)


Medium Pressure

From ISO 18752 constant working pressure hoses, as well as SAE 100R1 and 100R2, and abrasion resistant one- and two-wire braided hoses, Parker offers high performance hose and fittings for medium pressure needs. Parker's 43 Series fittings provide a broad offering to configurations and connection sizes.

[View Specs](#)
[View Product PDF](#)


High Pressure

The combination of Parker's high pressure, spiral reinforced No-Skive hoses, coupled with Monoblok one-piece fittings, provides the best in leak-free operation. With constant working pressure hoses designed to the ISO 18752 standard and a variety of abrasion resistant covers, inner tube compounds and accessories, there's a Parker high pressure hose for most applications.

[View Specs](#)
[View Product PDF](#)

Fluid Connectors Thermoplastic Products

Straight and Formed Thermoplastic Hydraulic Products



- Mobile and industrial hydraulic applications
- Thermoplastic hoses up to 10000 psi
- Non-conductive, low temperature and flame resistant hoses
- Rubber/Thermoplastic Hybrid™ hoses with compact O.D. and long, continuous lengths

- High pressure diagnostic and lubrication products
- Preformed and coiled hose
- Metal hose
- Twinline and Multi-line products
- Crimpers, tooling and accessories

[View Specs](#)
[View Product PDF](#)

Fluoropolymer Hose Products




- High temperature/high pressure hydraulic applications
- Cryogenic temperatures
- Corrosive environments and/or media

- Specialty hoses for food/beverage and pharmaceutical
- Sizes: .250" up to 4" O.D.

[View Specs](#)
[View Product PDF](#)

Ultra High Pressure Products

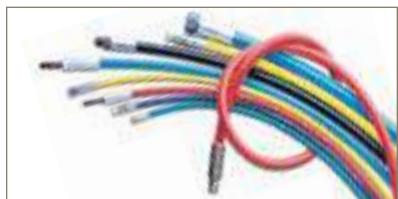

- Thermoplastic hose, rated up to 55,000 psi, for high pressure hydraulic, oil and gas and water blast applications
- Twin-line options available

- Adapters, fittings and valves
- Umbilicals for subsea applications

[View Specs](#)
[View Product PDF](#)

Fluoropolymer Tubing Products



- Materials PTFE, FEP, PFA, HP PFA, ETFE
- Smoothbore, convoluted, corrugated, coiled and heat shrink
- High temperature, chemical resistant applications

- FDA and USP Class VI compliant
- Custom tubing and profile extrusions
- Sizes: .006" I.D. up to 4" O.D.

Pneumatic and Transportation Products



- Industrial pneumatics
 - Tubing and coils in polyethylene, nylon, polypropylene, polyurethane and clear vinyl

- Transportation products
 - Airbrake tubing, Airbrake coils, fuel tubing and harnesses

[View Specs](#)
[View Product PDF](#)

Fluid Connectors Brass & Composite Products

[View Division Site](#)

Manifolds



- Multiple connections
- Composite body
- Lightweight
- Push-to-connect ports

Hose Barbs



- All brass construction
- SAE straight threads
- Metric threads
- Fluorocarbon O-ring standard
- Compact forged shapes
- Use with hose clamp

Ball Valves



- Available in brass, carbon steel, stainless steel
- Sizes from 1/8"-3"
- Pressures from 200 – 6,000 psi
- Various handle options
- Full flow available
- NPT, SAE straight threads, ISO 6149 ports, BSPP threads

45 Degree Flare Fittings



- Reusable
- Resist vibration
- Resist mechanical pullout
- Easy to assemble and disassemble
- Extrusions and forgings available

Pipe Fittings



- SAE standards
- Large range of sizes and styles
- Pre-applied sealant available
- Threads made to dryseal standards
- Extrusions and forgings available

Vibra-Lok



- Excellent vibration resistance
- Fluorocarbon sleeve for higher temperatures
- Used with wide range of tubing
- Simple to assemble
- NPTF threads and SAE straight threads standard
- Optional threads available

Fluid Connectors Brass & Composite Products

[View Division Site](#)

Low Pressure Hydraulic Connectors



- Push-to-connect design
- Use with Parflex XDT tubing
- All brass
- 60% weight reduction

- Hydraulic pilot line application – 450 psi
- Reduces assembly time 50%

Air Brake-NTA Fittings



- Meets D.O.T. FMVSS 571.106 performance
- Meets functional SAE J246 & J1131
- Staked in tube support

- Pre-applied sealant on male threads
- Use with J844 Type A and B nylon tubing
- Nickel plated versions available for Bio-diesel >B20

PTC- Push-In Air Brake Fittings



- Composite body: strong, light-weight, compact and impact resistant
- Rigid tube support stays in place for ease of proper assembly
- Innovative collet design insures positive grip on tubing

- Composite body can be rotated after assembly to align shaped fittings for proper orientation
- Meets performance requirements of D.O.T. FMVSS 571.106, SAE J1131 and SAE J2494-3
- Reduces assembly variability

Prestomatic- Push-In Air Brake Fittings



- Staked in stainless steel tube support
- All brass body
- Patented collet
- Superior side load leakage resistance

- Reusable/repairable
- Extended temperature and pressure rating
- Designed for easy assembly
- Impact resistant
- Contamination resistant

Fluid Connectors Quick Couplings

General Purpose Quick Couplings



General purpose couplings are used across the spectrum of hydraulic and pneumatic applications. They can also be custom engineered for more demanding applications and design challenges.

- Sizes from $\frac{1}{8}$ " to 4"
- Brass, steel, stainless steel, plastic
- Pressures to 6000 psi
- Flows up to 200 GPM
- Temp. range from -40° to +400°F

[Quick Coupling PDF](#)
[Snap-tite H, IH & PH Series PDF](#)

Non-Spill Quick Couplings



Non-spill couplings meet today's requirements for more environmentally and user-safe products. They eliminate excess spillage, reducing hazards in the workplace, as well as contamination to the environment.

- Sizes from $\frac{1}{4}$ " to 2"
- Steel, stainless steel, plastic
- Pressures to 10,000 psi
- Flows up to 50 GPM
- Temp. range from -40° to +400°F

[59 Series PDF](#)
[FET Series PDF](#)
[FEM/FEC Series PDF](#)
[FEM Series PDF](#)
[Snap-tite 71 Series PDF](#)
[PF Series PDF](#)
[Quick Couplings PDF](#)

Swivels



The S and PS Series swivels are designed to reduce torque and eliminate hose twist, dramatically increasing the service life of hose and fittings. The full flow design minimizes pressure drop for optimum system performance.

- Sizes from $\frac{1}{4}$ " to 2"
- Steel, stainless steel
- Pressures to 5000 psi
- Inline and 90° (PS Series); 90° (S Series)
- Standard zinc with clear trivalent, plating, nickel plating

[PS & S Series PDF](#)
[Quick Coupling PDF](#)

Fluid Connectors Quick Couplings

Check Valves



Check valves are available in several configurations, so they can be easily adapted to nearly any hydraulic application. Parker check valves offer several unique features that will ensure years of trouble-free operation.

- Standard inline configuration
- Sizes from 1/4" to 2"
- Pressures to 6000 psi
- Crack pressures: 5–200 psi
- Soft seat and stainless steel options

[Quick Coupling Series PDF](#)

Diagnostic Equipment and Test Port Couplings



Parker's complete line of diagnostic equipment can reduce machine downtime during set-ups, trouble shoot problems and provide critical information for preventative maintenance. Diagnostic nipples provide quick access for testing while diagnostic equipment measures system pressure, flow, RPM and temperature.

Equipment:

- ServiceJunior – measures pressure to 8700 psi
- Serviceman Plus and Service Master Easy - measures and records pressure, temperature, RPM and flow
- Service Master Plus – captures data and has on-board analysis

[Quick Coupling Series PDF](#)[Serviceman Plus PDF](#)[Service Master Easy PDF](#)

Multi-Couplings



Plate mounted couplings allow multiple fluid lines to be connected simultaneously. Lever or handle brings both halves together and holds them in a connected position.

- Single point connection
- Plate mounted stab couplings
- Custom configured and standard options

[Tema Multi-Line PDF](#)

Fluid Connectors Tube Fittings

0-Ring Face Seal Fittings



- O-ring seal for leak-free connections up to 9000 psi
- Adaptable to inch and metric tube and hose assemblies
- Flat face design provides zero tube entry and excellent over torque resistance
- Offered with SAE, NPT, ISO 6149, BSPP and metric port ends
- Meets SAE J1453 and ISO 8434-3

[View Specs](#)[View Product PDF](#)

37° Flare Fittings



- Metal-to-metal seal for wide temperature range application
- Adaptable to inch and metric tube and hose assemblies
- Offered with SAE, NPT, ISO 6149, BSPP, BSPT and metric port ends
- Meets SAE J514 and ISO 8434-2

[View Specs](#)[View Product PDF](#)

24° Flareless Fittings



- Metal-to-metal seal for wide temperature range application
- Suitable for use with inch tube in wall thicknesses from medium to heavy
- Offered with SAE and NPT port ends
- Meets SAE J514

[View Specs](#)[View Product PDF](#)

Fluid Connectors Tube Fittings

Metric 24° Flareless Fittings



- Three pressure ranges for optimum compactness
- For use with metric tube and hose assemblies

- Offered with SAE, NPT, ISO 6149, BSPP, BSPT, metric parallel and tapered port ends
- Meets DIN 2353 and ISO 8434-1

[View Product PDF](#)

Pipe Fittings and Adapters



- Metric and BSP conversion adapters
- BSPP 60° cone fittings and adapters
- NPT fittings and adapters

- BSPP 30° flare fittings and adapters
- Metric 30° flare fittings and adapters

[View Specs](#)[View Product PDF](#)

4-Bolt Flange Connections



- Forged construction for optimal performance
- Available in kit form with mounting hardware
- Flanges offered with female SAE, NPT, BSPP, socket-weld and butt-weld connections

- Flange adapters offered with O-ring face seal, 37° flare and 24° flareless connections
- Meets SAE J518 and ISO 6162

[View Specs](#)[View Product PDF](#)

Hydrostatic Transmission

Gold Cup



The Gold Cup Hydrostatic Transmission pumps are variable displacement piston pumps of an unparalleled rugged design. Rated to 5000 psi continuous pressure and continuous duty, the Gold Cup design has the unique feature of an internal servo/replenish and the ability to utilize system over pressure to directly control the stroking chambers. This affords the fastest and most stable control strategy available.

The controls are completely modular in design and can be configured to meet most system requirements with standard factory options.

All internal wear surfaces are hydrostatically balanced and/or hydraulically linked allowing for a long and serviceable life. The Gold Cup pump also has the ability to run in many open loop applications and

also has digital (flow/pressure) capability for the most difficult of control requirements.

The Gold Cup Series has been designed to operate in a wide range of industries needing closed-loop control, high pressure, high power density such as blast hole drill rigs, shredding, cranes, mining, hydraulic test stands, pulp and paper, military, marine and power generation.

- Quick change valve block – easy to service or replace
- Modular controls – easy to service and change
- Versatile controls – can be located on either side of pump or motor for maximum freedom of design
- Dampened low inertia rocker cam – more stable, quieter and faster than other designs
- Exclusive zero-backlash rotary servo design – lifetime accuracy
- Field adjustable compensator override – easily adjusted without removing from machinery
- Precision barrel bearing, a distinctive Parker Denison Hydraulics feature for over 30 years – permits high speeds, high pressure and provides long life
- Patented ring style replenishing checks – fastest operation with no sliding poppets or parts and low pressure drop
- Hot oil shuttle available – fast, reliable operation
- Auxiliary pump can be changed without disassembling the transmission
- Standard SAE keyed or splined drive shafts are available
- High pressure mechanical shaft seals can be changed without disassembling the transmission. Double lip seals are also available
- One piece stroking vane/cam means no lost motion, zero backlash, better control, and no linkages to wear out
- Stroking vane seals are pressure loaded for longer life
- Standard compensator vent ports allow for a wide variety of controls (see applications manual)
- Rocker cam displacement indicator helps troubleshoot the system
- Modulated servo pressure saves power
- Standard Code 62 SAE split flange connections
- Conforms to SAE mounting standards. These products are qualified to meet Military specifications MIL-P-17869A and MIL-S-901-C Grade A
- Fastest compensator response: Gives maximum of 10% pressure overshoot at rated conditions (guaranteed times under all conditions; faster response times possible depending upon application)

[View Specs](#)
[View Product PDF](#)

| Frame Size P/M | 6 | 7 | 8 | 11 | 14 | 24 | 30 |
|---|-------------|---------------|-------------|-------------|-------------|---------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 98.3 6 | 118.8 7.25 | 131.1 8 | 180.3 11 | 229.5 14 | 403.2 24.6 | 501.5 30.6 |
| Max continuous pressure (bar) (psi) | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 350* 5000* | 350* 5000* |
| Max intermittent pressure** (bar) (psi) | 420 6000 | 420 6000 | 350 5000 | 420 6000 | 420 6000 | 350* 5000* | 350* 5000* |
| Max rated drive speed (RPM) | 3000 | 3000 | 2700 | 2400 | 2400 | 2100 | 1800 |

*Variable speed. Higher servo pressure may be required.

**10% of operating time, not exceeding 6 successive seconds.



Hydrostatic Transmissions

Integrated Hydrostatic Transmissions: HTE, HTJ & HTG



- Field proven durability
- Integrated, efficient design
- High efficiency performance
- Compact design
- No gearbox
- Cooler running
- Less maintenance downtime

HTE and HTJ

The HTE transmission has a 1" diameter shaft for use on machines with tires up to 24" diameter and gross vehicle weights (GVW) up to 1300 lb. HTJ units use the same motors as the HTE but have 1.25" shafts with heavier bearings for use on vehicle also with up to 24" diameter tires but with GVW up to 1600 lb. Both use time proven 10 cc pumps

[View Specs](#)

| | HTE, HTJ – 10 cc Pump | | | | | |
|-----------------------------|-----------------------|------|------|------|------|------|
| Motor Displacement (cc/rev) | 130 | 165 | 195 | 228 | 260 | 293 |
| Continuous torque (lb-in) | 1580 | 1980 | 2415 | 2710 | 3140 | 3560 |
| Maximum torque (lb-in) | 3115 | 3845 | 4675 | 4555 | 4870 | 5180 |
| Output Speed (RPM)* | 265 | 212 | 177 | 152 | 133 | 118 |

HTG

HTG transmissions incorporate the industry standard TG Series motors for use with vehicles using tires of up to 26" in diameter and gross vehicle weights (GVW) of up to 2500 lb. Two pump options are offered.

[View Specs](#)

| | HTG | | | | | |
|-----------------------------|------------|------|------|------------|------|------|
| | 14 cc Pump | | | 16 cc Pump | | |
| Motor Displacement (cc/rev) | 240 | 280 | 310 | 240 | 280 | 310 |
| Continuous torque (lb-in) | 3090 | 3590 | 4250 | 2680 | 3110 | 3680 |
| Maximum torque (lb-in) | 5990 | 7040 | 8180 | 5990 | 7040 | 8180 |
| Output Speed (RPM)* | 200 | 171 | 154 | 228 | 195 | 177 |

*At 3600 RPM input to pump

Hydraguide™ Hydrostatic Steering Unit: HGF



- Compact package size
- Patented pressure dams
- Removable upper column
- Full pressure shaft seal
- Internal relief valve
- Low noise option
- Manual emergency steering

[View Specs](#)

| Frame size HGF | -08 | -10 | -12 | -16 | -20 | -24 |
|---|--------------|--------------|--------------|---------------|---------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 54.1 3.30 | 67.7 4.13 | 81.1 4.95 | 108.2 6.60 | 135.2 8.25 | 162.3 9.9 |
| Max continuous pressure (bar) (psi) | 124 1800 | 124 1800 | 124 1800 | 124 1800 | 124 1800 | 124 1800 |
| Flow (LPM) (GPM) | 30 8 | 30 8 | 30 8 | 30 8 | 30 8 | 30 8 |

Motors Low Speed High Torque

Nichols



- Single and two-speed styles
- Rugged, compact design
- Unique IGR power element
- Integral selector valve on two-speed styles
- Maximum supply pressure 276 bar (4000 psi)

[View Specs](#)

[View Product 700 PDF](#)

[View Product 110A PDF](#)

[View Product 716 PDF](#)

| Series 700 | 072 | 108 | 142 | 176 | 212 | 258 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|
| Geometric displacement | | | | | | |
| Series (cm ³ /rev) (in ³ /rev) | 59 3.6 | 88 5.4 | 116 7.1 | 144 8.8 | 174 10.6 | 211 12.9 |
| Parallel (cm ³ /rev) (in ³ /rev) | 118 7.2 | 177 10.8 | 233 14.2 | 288 17.6 | 347 21.2 | 423 25.8 |
| Max cont. differential pressure | | | | | | |
| Series (bar) (ps) | 170 2500 | 170 2500 | 170 2500 | 170 2500 | 155 2250 | 155 2250 |
| Parallel (bar) (ps) | 170 2500 | 170 2500 | 170 2500 | 170 2500 | 155 2250 | 138 2000 |
| Max operating speed | | | | | | |
| Series (rev/min) | 890 | 843 | 695 | 688 | 580 | 440 |
| Parallel (rev/min) | 782 | 656 | 481 | 419 | 352 | 268 |

| Series 110A | 036 | 054 | 071 | 088 | 106 | 129 | 164 | 189 | 241 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Geometric displacement (cm ³ /rev) (in ³ /rev) | 59 3.6 | 89 5.4 | 116 7.1 | 144 8.8 | 174 10.6 | 211 12.9 | 269 16.4 | 310 18.9 | 395 24.1 |
| Max continuous pressure (bar) (ps) | 170 2500 | 170 2500 | 170 2500 | 170 2500 | 155 2250 | 155 2250 | 140 2000 | 140 2000 | 120 1750 |
| Max operating speed (rev/min) | 858 | 740 | 684 | 622 | 519 | 437 | 415 | 350 | 279 |

| Series 716 | 072 | 108 | 142 | 176 | 212 | 258 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|
| Geometric displacement | | | | | | |
| Series (cm ³ /rev) (in ³ /rev) | 59 3.6 | 88 5.4 | 116 7.1 | 144 8.8 | 174 10.6 | 211 12.9 |
| Parallel (cm ³ /rev) (in ³ /rev) | 118 7.2 | 177 10.8 | 233 14.2 | 288 17.6 | 347 21.2 | 423 25.8 |
| Max cont. differential pressure | | | | | | |
| Series (bar) (ps) | 170 2500 | 170 2500 | 170 2500 | 170 2500 | 155 2250 | 120 1750 |
| Parallel (bar) (ps) | 170 2500 | 140 2000 | 100 1500 | 85 1250 | 85 1250 | 70 1000 |
| Max operating speed | | | | | | |
| Series (rev/min) | 890 | 843 | 695 | 688 | 580 | 440 |
| Parallel (rev/min) | 782 | 656 | 481 | 419 | 352 | 268 |

Motors Fixed Displacement Low Speed High Torque

Torqmotor™ Small Frame



- High volumetric efficiency
- Long life
- Full flow spline cooling
- High pressure shaft seal
- High flow shaft seal cooling
- High starting torque

[View Specs](#)
[View Product PDF](#)

| Frame size TC | -0036 | -0045 | -0050 | -0065 | -0080 | -0100 | -0130 | -0165 | -0195 | -0230 | -0260 | -0295 | -0330 | -0365 | -0390 |
|---|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 36 2.2 | 41 2.5 | 49 3.0 | 65 4.0 | 82 5.0 | 98 6.0 | 130 8.0 | 163 10.0 | 195 11.9 | 228 13.9 | 260 15.9 | 293 17.9 | 328 20.0 | 370 22.6 | 392 24.0 |
| Max cont pressure (bar) (psi) | 86 1250 | 86 1100 | 76 950 | 66 850 | 59 750 | 52 650 | 45 650 | 45 650 |
| Max operating speed (RPM) | 902 | 794 | 688 | 517 | 413 | 460 | 429 | 346 | 287 | 246 | 217 | 193 | 173 | 152 | 144 |

| Frame size TB | -0036 | -0045 | -0050 | -0065 | -0080 | -0100 | -0130 | -0165 | -0195 | -0230 | -0260 | -0295 | -0330 | -0365 | -0390 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 36 2.2 | 41 2.5 | 49 3.0 | 65 4.0 | 82 5.0 | 98 6.0 | 130 8.0 | 163 10.0 | 195 11.9 | 228 13.9 | 260 15.9 | 293 17.9 | 328 20.0 | 370 22.6 | 392 24.0 |
| Max cont pressure (bar) (psi) | 125 1800 | 125 1500 | 103 1450 | 100 1450 | 97 1400 | 93 1350 | 86 1250 | 83 1200 |
| Max operating speed (RPM) | 932 | 805 | 678 | 511 | 409 | 454 | 430 | 343 | 287 | 246 | 216 | 191 | 171 | 151 | 143 |

| Frame size TE | -0036 | -0045 | -0050 | -0065 | -0080 | -0100 | -0130 | -0165 | -0195 | -0230 | -0260 | -0295 | -0330 | -0365 | -0390 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 36 2.2 | 41 2.5 | 49 3.0 | 65 4.0 | 82 5.0 | 98 6.0 | 130 8.0 | 163 10.0 | 195 11.9 | 228 13.9 | 260 15.9 | 293 17.9 | 328 20.0 | 370 22.6 | 392 24.0 |
| Max cont pressure (bar) (psi) | 140 2030 | 140 1740 | 120 1595 | 110 1450 | 100 1450 | 100 1450 | 95 1378 | 85 1233 |
| Max operating speed (RPM) | 1141 | 1024 | 1020 | 877 | 695 | 582 | 438 | 348 | 292 | 328 | 287 | 256 | 228 | 203 | 191 |

Torqmotor™ Medium Frame



- High volumetric efficiency
- Full flow spline cooling
- High pressure shaft seal
- High flow shaft seal cooling

- High starting torque
- High side load capacity
- Long life

[View Specs](#)
[View Product PDF](#)

| Frame size TJ | -0045 | -0050 | -0065 | -0080 | -0100 | -0130 | -0165 | -0195 | -0230 | -0260 | -0295 | -0330 | -0365 | -0390 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 41 2.5 | 49 3.0 | 65 4.0 | 82 5.0 | 98 6.0 | 130 8.0 | 163 10.0 | 195 11.9 | 228 13.9 | 260 15.9 | 293 17.9 | 328 20.0 | 370 22.6 | 392 24.0 |
| Max cont pressure (bar) (psi) | 140 2030 | 140 1740 | 110 1595 | 100 1450 | 100 1450 | 95 1378 | 85 1233 |
| Max operating speed (RPM) | 1024 | 1020 | 877 | 695 | 582 | 438 | 348 | 292 | 328 | 287 | 256 | 228 | 203 | 191 |

Motors Fixed Displacement Low Speed High Torque

Torqmotor™ Large Frame



- High volumetric efficiency
- Full flow spline cooling
- High pressure shaft seal
- High flow shaft seal cooling
- High starting torque
- High side load capacity
- Long life

[View Specs](#)

| Frame size TF | -0080 | -0100 | -0130 | -0140 | -0170 | -0195 | -0240 | -0280 | -0360 | -0405 | -0475 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 81 4.9 | 100 6.1 | 128 7.8 | 141 8.6 | 169 10.3 | 197 12.0 | 238 14.5 | 280 17.1 | 364 22.2 | 405 24.7 | 477 29.1 |
| Max cont pressure (bar) (psi) | 207 3000 | 155 2250 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 130 1880 | 128 1850 | 113 1645 |
| Max operating speed (RPM) | 693 | 749 | 583 | 530 | 444 | 381 | 394 | 334 | 258 | 231 | 195 |

[View Product PDF](#)

[View Specs](#)

| Frame size TG | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0335 | -0405 | -0475 | -0530 | -0625 | -0785 | -0960 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.6 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 138 2000 | 138 2000 | 121 1750 | 103 1500 | 69 1000 | |
| Max operating speed (RPM) | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 232 | 237 | 213 | 182 | 143 | 118 |

[View Product PDF](#)

[View Specs](#)

| Frame size TGK | 0110 | 0140 | 0170 | 0195 | 0240 | 0280 | 0310 | 0335 | 0360 | 0405 | 0475 | 0530 | 0625 | 0785 | 0960 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 110 6.9 | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.3 | 360 22.2 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 241 3500 | 224 3250 | 190 2750 | 152 2200 | 124 1800 |
| Max operating speed (RPM) | 672 | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 263 | 232 | 237 | 231 | 182 | 143 | 118 |

[View Product PDF](#)

[View Specs](#)

| Frame size TH | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0335 | -0405 | -0475 | -0530 | -0625 | -0785 | -0960 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.6 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 138 2000 | 138 2000 | 121 1750 | 103 1500 | 69 1000 | |
| Max operating speed (RPM) | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 232 | 237 | 213 | 182 | 143 | 118 |

[View Product PDF](#)

[View Specs](#)

| Frame size TK | -0250 | -0315 | -0400 | -0500 | -0630 | -0800 | -1000 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 250 15.3 | 315 19.2 | 400 24.4 | 500 30.5 | 630 38.4 | 800 48.8 | 1000 61 |
| Max cont pressure (bar) (psi) | 241 3500 | 241 3500 | 207 3000 | 207 3000 | 207 3000 | 190 2750 | 172 2500 |
| Max operating speed (RPM) | 523 | 413 | 373 | 298 | 237 | 276 | 218 |

[View Product PDF](#)

[View Specs](#)

| Frame size TL | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0360 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 140 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 364 22.2 |
| Max cont pressure (bar) (psi) | 190 2750 | 190 2750 | 190 2750 | 190 2750 | 190 2750 | 190 2750 | 172 2500 |
| Max operating speed (RPM) | 613 | 512 | 484 | 399 | 335 | 310 | 255 |

[View Product PDF](#)



Motors Fixed Displacement Low Speed High Torque

Torqmotor™ and Brake Motors



DF, DG



BG, BH

- High volumetric efficiency
- Full flow spline cooling
- High pressure shaft seal
- High flow shaft seal cooling
- High starting torque
- High side load capacity
- Long life

Mechanical Brakes

[View Specs](#)[View Product PDF](#)

| Frame size DF | -0080 | -0100 | -0130 | -0140 | -0170 | -0195 | -0240 | -0280 | -0360 | -0405 | -0475 |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm³/rev) (in³/rev) | 81 4.9 | 100 6.1 | 128 7.8 | 141 8.6 | 169 10.3 | 197 12.0 | 238 14.5 | 280 17.1 | 364 22.2 | 405 24.7 | 477 29.1 |
| Max cont pressure (bar) (psi) | 207 3000 | 155 2250 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 130 1880 | 128 1850 | 113 1645 |
| Max operating speed (RPM) | 693 | 749 | 583 | 530 | 444 | 381 | 394 | 334 | 258 | 231 | 195 |

Max holding torque: 497 N.m. (4,400 in lbs)

[View Specs](#)[View Product PDF](#)

| Frame size DG | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0335 | -0405 | -0475 | -0530 | -0625 | -0785 | -0960 |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm³/rev) (in³/rev) | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.6 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 207 3000 | 172 2500 | 138 2000 | 138 2000 | 121 1750 | 103 1500 | 69 1000 |
| Max operating speed (RPM) | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 232 | 237 | 213 | 182 | 143 | 118 |

Max holding torque: 497 N.m. (4,400 in lbs)

Spring Applied, Hydraulically Released Brakes

[View Specs](#)[View Product PDF](#)

| Frame size BG | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0335 | -0405 | -0475 | -0530 | -0625 | -0785 | -0960 |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm³/rev) (in³/rev) | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.6 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 207 3000 | 172 2500 | 138 2000 | 138 2000 | 121 1750 | 103 1500 | 69 1000 |
| Max operating speed (RPM) | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 232 | 237 | 213 | 182 | 143 | 118 |

Rated holding capacity: 1350 N.m. (12,000 in lbs)

[View Specs](#)[View Product PDF](#)

| Frame size BH | -0140 | -0170 | -0195 | -0240 | -0280 | -0310 | -0335 | -0405 | -0475 | -0530 | -0625 | -0785 | -0960 |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm³/rev) (in³/rev) | 141 8.6 | 169 10.3 | 195 11.9 | 238 14.5 | 280 17.1 | 310 18.9 | 337 20.6 | 405 24.7 | 477 29.1 | 528 32.3 | 623 38.0 | 786 48.0 | 959 58.5 |
| Max cont pressure (bar) (psi) | 207 3000 | 172 2500 | 138 2000 | 138 2000 | 121 1750 | 103 1500 | 69 1000 |
| Max operating speed (RPM) | 660 | 554 | 477 | 393 | 334 | 303 | 277 | 232 | 237 | 213 | 182 | 143 | 118 |

Rated holding capacity: 1800 N.m. (16,000 in lbs)



Motors Variable Displacement Axial Piston

V12



[View Specs](#)

- Very high operating speeds
- Displacement ratio 5:1
- Pressures to 482 bar (7000 psi)
- Very high power capability
- High starting torque
- Low weight
- High overall efficiency
- Axial or side ports
- Controls available for most needs
- ISO, SAE and cartridge versions

| Frame size V12 | -60 | -80 |
|---|-------------|-------------|
| Displacement: 35° (max): (cm ³ /rev) (in ³ /rev) | 60 3.66 | 80 4.88 |
| 6.5° (min): (cm ³ /rev) (in ³ /rev) | 12 0.73 | 16 0.98 |
| Max continuous pressure (bar) (psi) | 420 6000 | 420 6000 |
| Max operating speed* (RPM) | 5600 | 5000 |

*At reduced displacement

V14



[View Specs](#)

- For open or closed circuits
- High starting torque and smooth operation
- Increased shaft speeds and improved support
- Improved sealing
- Faster control response
- Enlarged setting piston
- Tapered roller bearings
- Wide displacement range 5:1
- Small envelope size and high power-to-weight ratio
- Robust motor with long service life and proven reliability

| Frame size* V14 | -110 | -160 |
|---|-------------|-------------|
| Displacement: 35° (max): (cm ³ /rev) (in ³ /rev) | 110 6.71 | 160 9.76 |
| 6.5° (min): (cm ³ /rev) (in ³ /rev) | 22 1.34 | 32 1.95 |
| Max continuous pressure (bar) (psi) | 420 6000 | 420 6000 |
| Max operating speed** (RPM) | 5700 | 5000 |

*Additional frame sizes in preparation.

**At reduced displacement

T12



[View Specs](#)

- Designed specifically for track drives
- Very high operating speeds
- Pressures to 482 bar (7000 psi)
- Very high power capability
- High starting torque
- Low weight
- High overall efficiency
- Axial or side ports
- Two-position control
- Cartridge version available

| Frame size T12 | -60 | -80 |
|---|-------------|-------------|
| Displacement: 35° (max): (cm ³ /rev) (in ³ /rev) | 60 3.66 | 80 4.88 |
| 10° (min): (cm ³ /rev) (in ³ /rev) | 18 1.10 | 24 1.46 |
| Max continuous pressure (bar) (psi) | 420 6000 | 420 6000 |
| Max operating speed* (RPM) | 5600 | 5000 |

*At reduced displacement

Motors Fixed Displacement Bent-Axis Piston

F11



F11 is the well proven bent-axis, fixed displacement heavy-duty motor/pump series. They can be used in numerous applications in on both open and closed loop circuits.

- Very high motor operating speeds
- Pressures to 420 bar (6000 psi)
- Efficient (low losses)
- Accepts high external shaft loads
- SAE, ISO and Cartridge mount available

- Compact, lightweight motor and pump
- Integral anti-cavitation valves available on certain displacements
- Good resistance to vibrations and temperature shocks
- Proven reliability
- Easy to service with very few moving parts
- Heavy duty roller bearings

[View Specs](#)
[View Product PDF](#)

| Frame size* F11 | -05 | -10 | -12 | -14 | -19 |
|---|-------------|-------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 4.9 0.30 | 9.8 0.60 | 12.5 0.76 | 14.3 0.87 | 19.0 1.16 |
| Max continuous pressure (bar) (psi) | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 350 5000 |
| Max operating speed** (RPM) | 12,800 | 10,200 | 9400 | 9000 | 8100 |

*Use F12 for medium range displacement

**Functioning as motor

F12



Series F12 is the high performance bent-axis, fixed displacement heavy-duty motor/pump series. They can be used in numerous applications at unusually high shaft speeds.

- Very high motor operating speeds
- Pressures to 480 bar (7000 psi)
- High starting torque
- Very high power capability
- High overall efficiency
- Compact, lightweight motor and pump

- Laminated piston ring provides low internal leakage and thermal shock resistance
- Accessory valves available
- ISO, SAE and cartridge versions available
- Proven reliability
- Easy to service with very few moving parts
- Super-shockless swing relief valve

[View Specs](#)
[View Product PDF](#)

| Frame size F12 | -30 | -40 | -60 | -80 | -90 | -110 | -125 | -150 | -250 |
|---|--------------|--------------|--------------|--------------|-------------|---------------|--------------|---------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 30.0 1.83 | 40.0 2.44 | 59.8 3.65 | 80.4 4.90 | 93.0 5.7 | 110.1 6.72 | 125.0 7.6 | 150.0 9.15 | 242.0 14.80 |
| Max continuous pressure (bar) (psi) | 420 6000 | 420 6000 | 420 6000 | 420 6000 | 420 6000 | 420 6000 | 420 6000 | 350 5000 | 350 5000 |
| Max operating speed (RPM) | 6700 | 6100 | 5300 | 4800 | 4600 | 4400 | 4200 | 3200 | 2700 |

Motors High Speed

M2



- High starting torque typically 90% of running torque
- Smooth output torque throughout the entire speed range
- Bi-directional operation

- High pressure shaft seal
- Standard SAE mounting
- Long life and quiet operation
- Heavy duty bearings

[View Product PDF](#)

| Frame size M2 | -085 | -127 | -169 | -254 | -339 | -508 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 13.9 0.85 | 20.8 1.27 | 27.7 1.69 | 41.6 2.54 | 55.6 3.39 | 83.2 5.08 |
| Max continuous pressure (bar) (psi) | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 69 1000 |
| Max intermittent pressure* (bar) (psi) | 166 2400 | 166 2400 | 166 2400 | 166 2400 | 166 2400 | 97 1400 |
| Max transient pressure** (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 117 1700 |
| Recommended speeds (RPM) | 50-5000 | 40-4000 | 36-3600 | 30-3000 | 20-2000 | 15-1500 |

*Intermittent conditions are to be less than 10% of each minute.

**Transient conditions are to be less than 1% of every minute.

Minimum speeds based on constant load. Consult factory for speeds outside range.

M4



- High starting torque typically 90% of running torque
- Smooth output torque throughout the entire speed range
- Bi-directional operation

- High pressure shaft seal
- Standard SAE mounting
- Long life and quiet operation
- Heavy duty bearings

[View Specs](#)

[View Product PDF](#)

| Frame size M4 | -015 | -030 | -045 | -060 | -075 |
|---|--------------|--------------|--------------|--------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 2.45 0.15 | 4.91 0.30 | 7.37 0.45 | 9.83 0.60 | 12.29 0.75 |
| Max continuous pressure (bar) (psi) | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 138 2000 |
| Max intermittent pressure* (bar) (psi) | 166 2400 | 166 2400 | 166 2400 | 166 2400 | 166 2400 |
| Max transient pressure** (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 |
| Recommended speeds (RPM) | 75-7500 | 50-5000 | 50-5000 | 36-3600 | 30-3000 |

*Intermittent conditions are to be less than 10% of each minute.

**Transient conditions are to be less than 1% of every minute.

Minimum speeds based on constant load. Consult factory for speeds outside range.

Motors Calzoni Radial Piston LSHT

Calzoni Motors

The outstanding performance of this robust product is the result of the original, patented design. Used widely in the mining, off shore drilling, oil field, and marine winch markets; the Calzoni motor is produced in sizes

from 32cc up to 6 gallons per revolution. The efficiency of design allows for a smaller installed product for the same displacement vs the competition. Since there are no internal connecting rods, the

frictional drag is greatly reduced as well as most thrust loading. By creating a static balance on the shaft expected lifetime is extended.

MR-MRE Series-Fixed Displacement



- 5 piston design
- Wide range of displacement
- Starting torque from 90-95% theoretical
- Total efficiency up to 96%

- Resistance to thermal shocks $\Delta T=176^{\circ}\text{F}$
- Speed feedback accessories optional

[View Specs](#)
[View Product PDF](#)

| Frame size MR/E* | 33 | 57 | 73 | 93 | 110 | 125 | 160 | 190 | 200 | 250 | 300 |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 32.1 2.0 | 56.4 3.4 | 72.6 4.4 | 92.6 5.7 | 109.0 6.7 | 124.7 7.6 | 159.7 9.8 | 191.6 11.7 | 199.2 12.2 | 250.9 15.3 | 304.4 18.6 |
| Max pressure (bar) (psi) | 300 4350 | 300 4350 | 300 4350 |
| Max speed (RPM) | 1400 | 1300 | 1200 | 1150 | 1100 | 900 | 900 | 850 | 800 | 800 | 750 |
| Frame size MR/E* | 330* | 350 | 450 | 500* | 600 | 700 | 800* | 1100 | 1400* | 1600 | 1800 |
| Displacement (cm ³ /rev) (in ³ /rev) | 332.4 20.1 | 349.5 21.3 | 451.6 27.6 | 497.9 30.4 | 607.9 37.1 | 706.9 43.1 | 804.2 49.1 | 1125.8 68.7 | 1369.5 83.6 | 1598.4 97.5 | 1809.6 110.4 |
| Max pressure (bar) (psi) | 250 3626 | 300 4350 | 300 4350 | 250 3626 | 300 4350 | 300 4350 | 250 3626 | 300 4350 | 250 3626 | 300 4350 | 300 4350 |
| Max speed (RPM) | 750 | 640 | 600 | 600 | 520 | 500 | 450 | 330 | 280 | 260 | 250 |
| Frame size MR/E* | 2100* | 2400 | 2800 | 3100* | 3600 | 4500 | 5400* | 6500 | 7000* | 8200 | |
| Displacement (cm ³ /rev) (in ³ /rev) | 2091.2 127.6 | 2393.1 139.9 | 2792.0 170.4 | 3103.7 189.4 | 3636.8 221.9 | 4502.7 274.8 | 5401.2 329.6 | 6460.5 394.2 | 6967.2 408.7 | 8226.4 502 | |
| Max pressure (bar) (psi) | 250 3626 | 300 4350 | 300 4350 | 250 3626 | 300 4350 | 300 4350 | 250 3626 | 300 4350 | 300 4350 | 250 3626 | |
| Max speed (RPM) | 250 | 220 | 215 | 215 | 180 | 170 | 160 | 130 | 130 | 130 | |

Motors Calzoni Radial Piston LSHT

MRT-MRTE-MRTF Series-Fixed Displacement



- Hydraulically balanced 10 and 14 piston twin row design
- Wide range of displacements
- Starting torque from 91% theoretical
- Total efficiency up to 96%
- Speed feedback accessories optional

[View Specs](#)
[View Product PDF](#)

| Frame size MRT/E*/F** | 7100 | 7800** | 8500* | 9000 | 9900** | 10800* | 14000 | 15500** |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|----------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 7100.4 433.5 | 7808.4 476.5 | 8517.3 519.8 | 9005.4 549.5 | 9903.9 604.4 | 10802.4 659.2 | 14010 854.9 | 15276 932.3 |
| Max pressure (bar) (psi) | 300 4350 | 250 3626 | 250 3626 | 300 4350 | 250 3626 | 250 3626 | 300 4350 | 250 3626 |
| Max speed (RPM) | 150 | 130 | 120 | 130 | 120 | 110 | 80 | 75 |

| Frame size MRT/E*/F** | 16500* | 17000 | 18000** | 19500 | 20000* | 21500** | 23000* |
|---|-----------------|-----------------|---------------|-----------------|-----------------|---------------|-----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 16542 1009.5 | 16759 1022.7 | 18025 1100 | 19508 1190.5 | 19788 1207.5 | 21271 1298 | 23034 1405.6 |
| Max pressure (bar) (psi) | 250 3626 | 300 4350 | 250 3626 | 300 4350 | 250 3626 | 250 3626 | 250 3626 |
| Max speed (RPM) | 70 | 70 | 65 | 60 | 60 | 55 | 50 |

MRD-MRDE Series-Dual Displacement, MRV-MRVE Series-Variable Displacement



- 5 piston design
- Displacement ratios of 1:2 or 1:3
- Starting torque from 90-95% theoretical
- Total efficiency up to 96%
- Resistance to thermal shocks ΔT=176°F
- Speed feedback accessories optional

[View Specs](#)
[View Product PDF](#)

| Frame size MRV/E* MRD/E* | 300 | 330* | 450 450 | 500* | 700 700 | 800* 800* | 1100 1100 | 1400* 1400* |
|---|---------------|---------------|---------------|---------------|---------------|---------------|----------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 304.1 18.6 | 332.4 20.3 | 451.6 27.6 | 497.9 30.4 | 706.9 43.1 | 804.2 49.1 | 1125.8 68.7 | 1369.5 83.6 |
| Max pressure (bar) (psi) | 300 4350 | 250 3626 | 300 4350 | 250 3626 | 300 4350 | 250 3626 | 300 4350 | 250 3626 |
| Max speed (RPM) | 1000 | 1000 | 850 | 800 | 700 | 650 | 580 | 550 |

| Frame size MRV/E* MRD/E* | 1800 1800 | 2100* 2100* | 2800 2800 | 3100* 3100* | 4500 4500 | 5400* 5400* |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 1809.6 110.4 | 2091.2 127.6 | 2792.0 170.4 | 3103.7 189.4 | 4502.7 274.8 | 5401.2 329.6 |
| Max pressure (bar) (psi) | 300 4350 | 250 3626 | 300 4350 | 250 3626 | 300 4350 | 250 3626 |
| Max speed (RPM) | 400 | 370 | 280 | 280 | 250 | 210 |



Motors Vane

M3-M5 Fixed Displacement



M4



M3

- Low ripple torque
- Low starting torque
- Low noise
- Bi-rotational technology
- Various pilot, threaded port and porting configurations
- External/internal drain option
- Many displacement combinations for double motor

[View Specs](#)

M5AF-M5BF Fan Drive Vane Motors



M5BF



M5AF



M5ASF

- Low noise
- Designed for severe duty applications
- High efficiency
- High starting torque
- Low torque ripple
- Long life
- Interchangeable rotating groups
- Cross port check valve on M5BF/1

| Series M | 3B | 4C | 4SC | 4D | 4SD | 4E | 4SE |
|---|--------------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 9.2-37.1 .5-2.3 | 24.4-80.1 1.4-4.9 | 24.4-80.1 1.4-4.9 | 65.1-144.4 3.9-8.8 | 65.1-144.4 3.9-8.8 | 158.5-222 9.6-13.6 | 158.5-222 9.6-13.6 |
| Max pressure* (bar) (psi) | 210 3000 | 175 2535 | 230 3335 | 175 2535 | 230 3335 | 175 2535 | 190 2795 |
| Max speed* (RPM) | 4000 | 4000 | 4000 | 4000 | 4000 | 3600 | 3600 |

| Frame size M | 4DC | 4SDC |
|---|------------------------|------------------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 89.5-224.5 5.4-13.7 | 89.5-224.5 5.4-13.7 |
| Max pressure* (bar) (psi) | 175 2535 | 230 3335 |
| Max speed* (RPM) | 4000 | 4000 |

[View Specs](#)

| Frame size M | 5AF | 5B/S | 5BF |
|---|-------------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 6.3-25 0.3-1.5 | 12-45 0.7 | 12-45 2.8 |
| Max pressure* (bar) (psi) | 300 4350 | 320 4650 | 320 4650 |
| Max speed* (RPM) | 6000 | 6000 | 6000 |

*Intermittent conditions are to be less than 10% of each minute.
Minimum speeds based on constant load. Consult factory for speeds outside range.

Power Take-off Chelsea®

252 Series 6-Bolt


[View Specs](#)
[View Product PDF](#)

- The 252 Series features the latest PTO technology for automatic transmissions
- The controlled compression interface gasket eliminates the setting of gear backlash
- The lightweight housing design allows for maximum heat dissipation

- Excellent gear contact ratio equals quiet operation
- Integrated cartridge valve - reduced installation time
- Torque up to 120 Lbs.ft - Able to power most application requirements

| Series | 252*D | 252*M |
|--|---------------------|-------------------|
| Standard output shaft size | 1" Round w/key | |
| Intermittent torque rating (lbs. ft) | 120 | 50 |
| Intermittent torque rating (N.m.) | 163 | 68 |
| Horserpower rating for intermittent service: at 500 RPM of output shaft (HP) at 1000 RPM of output shaft (HP) at 500 RPM of output shaft (Kw) at 1000 RPM of output shaft (Kw) | 11 23 9 17 | 5 10 4 7 |
| Approximate weight | 25 lbs. (11 kg) | |

236 Series 6-Bolt



- Powershift
- Patent pending internal self adjusting shaft brake option
- Wide selection of input gears for virtually all currently produced transmissions

- Inspection cove for adjusting backlash
- Helical gears and optional pressure lubrication to extend PTO service life
- Air or electric/air shift unit

[View Specs](#)
[View Product PDF](#)

| Series | 236*D | 236*K | 236*Q | 236*U |
|---|--------------|--------------|--------------|--------------|
| Standard output shaft size | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" |
| Intermittent torque rating (lbs. ft) | 250 | 250 | 250 | 225 |
| Horserpower rating for intermittent Service: at 500 RPM of output shaft at 1000 RPM of output shaft | 23.8 47.6 | 23.8 47.6 | 23.8 47.6 | 21.4 42.8 |

Power Take-off Chelsea®

238 Series 8-Bolt



- “Slip” Fit Idler Pin allows for ease of servicing
- Comes as a KIT PTO; Same input gears as 236 & 442 Series
- “Inspection” cover; Set backlash accurately
- 4 output speed ratios: wide coverage for customer applications
- 12 output options: large coverage for the toughest applications
- 5 mounting options; Flexibility of inventory & applications
- Up to 250 Lbs. ft. of torque; Covers most applications
- Shaft brake option (“BD”) patent # 7159701; Industry setting standard for product pump applications

[View Specs](#)
[View Product PDF](#)

| Series | 238*A, D, K & Q | 238*U |
|--|---------------------|-------|
| Standard output shaft size | 1- 1/4" Round w/key | |
| Intermittent torque rating (lbs. ft) | 250 | 225 |
| Intermittent torque rating (N.m.) | 339 | 305 |
| Horsepower rating for intermittent service | | |
| at 500 RPM of output shaft (HP) | 24 | 21 |
| at 1000 RPM of output shaft (HP) | 48 | 43 |
| at 500 RPM of output shaft (Kw) | 18 | 16 |
| at 1000 RPM of output shaft (Kw) | 36 | 32 |
| Approximate weight | 49 lbs. (22 kg) | |

880 Series 8-Bolt



- Two-gear
- Wide coverage for tough applications
- Speed ratios for high and low speed applications
- Removable shift cover for adjusting backlash
- Dual-pump output for mounting a pump on each end of the PTO

[View Specs](#)
[View Product PDF](#)

| Series | 880*B | 880*D | 880*G | 880*J | 880*M | 880*P | 880*R | 880*T |
|--------------------------------------|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| Standard output shaft size | 1 1/2" 10 spline with 1410 flange | | | | | | | |
| Intermittent torque rating (lbs. ft) | 500 | 500 | 500 | 500 | 500 | 500 | 400 | 350 |
| Service: at 500 RPM of output shaft | 47 | 47 | 47 | 47 | 47 | 47 | 38 | 33 |
| at 1000 RPM of output shaft | 94 | 94 | 94 | 94 | 94 | 94 | 76 | 66 |

Power Take-off Chelsea®

230/231, 270/271 Series 6-Bolt



230/231 Series

- Powershift
- Designed for both manual and automatic transmissions
- 231 offers low profile housing for avoiding clearance problems
- Pressure lubrication option available for both units
- Patent pending internal self adjusting shaft brake option
- Air or electric/air shift unit

270/271 Series

- Powershift
- Designed for automatic transmissions
- 271 offers low profile housing for avoiding clearance problems
- Pressure lubrication option available for both units
- Patent pending internal self adjusting shaft brake option
- Electric/hydraulic shift unit

[View Specs](#)
[View Product 230 PDF](#)
[View Product 231 PDF](#)

| Series | 230*A, B, D, K & Q 270*A, B, D w/Pressure Lube | 230*A, B, D, K & Q 270*A, B, D w/Standard Lube | 231 & 271 All Units w/Pressure Lube | 230*U/231*U All Lube Types |
|--|--|--|---|-------------------------------|
| Standard output shaft size | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" |
| Intermittent torque rating (lbs. ft) | 300 | 250 | 250 | 225 |
| Horsepower rating for intermittent service: at 500 RPM of output shaft at 1000 RPM of output shaft | 28.5 57 | 23.5 47 | 23.5 47 | 21.4 42.8 |

280 Series 10-Bolt



- Features single continuous duty torque rating instead of intermittent rating
- Torque capacity ratings have been increased
- Pump clearance issues have been improved with rotatable cast iron flanges
- New positive stop for driveline outputs; Eliminates ability for shaft couplings to damage oil seals
- Wet spline pump flange option provides 7 to 10 times greater shaft life

- Broader coverage of speed ranges expanding from 5 ratios to 9 ratios
- Lower and higher speed now available
- The pressure/lube hose will be included with the new 280 Series; No need to order separately
- Three option positions for the integrated solenoid valve; Remote mounted option provides maximum clearance

[View Specs](#)
[View Product PDF](#)

| Series | 280*B | 280*C | 280*D | 280*G | 280*K | 280*M | 280*P | 280*S | 280*T |
|--|--------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Standard output shaft size | 1-1/4" Round w/key | | | | | | | | |
| Intermittent & continuous torque rating (lbs. ft) | 300 | 390 | 390 | 360 | 340 | 318 | 290 | 265 | 240 |
| Intermittent & continuous torque rating (N.m.) | 407 | 529 | 529 | 488 | 461 | 431 | 393 | 359 | 325 |
| | | | | | | | | | |
| Horsepower rating for intermittent service at 500 RPM of output shaft (HP) at 1000 RPM of output shaft (HP) at 500 RPM of output shaft (Kw) at 1000 RPM of output shaft (Kw) | 29 57 | 37 74 | 37 74 | 34 69 | 32 65 | 30 61 | 28 55 | 25 50 | 23 46 |
| Approximate weight | 49 lbs. (22 kg) | | | | | | | | |

Power Take-off Chelsea®

249 Series 6-Bolt (for the Ford TorqueShift™ 6 Automatic Transmission)



- Noise suppression system provides quiet PTO applications for Ford SuperDuty patent pending
- No special installation tools to purchase; Eliminates costs and saves time
- Single hose connection and integrated actuation valve simplify installation and reduce installation time and eliminates leak paths
- Intermittent torque rating of 200 lbs. ft.; 58 horse power @ 1200 Engine RPM

- Two-year warranty; Greater bearing capacity, larger gear width and greater clutch engagement surface provide a robust design
- Pump flows up to 25.1 GPM at 1200 Engine RPM; Standard S.A.E. flanges and shafts allow for a wider variety of flows and pressures
- Simplified ordering: PTO, pump, wiring harness and shift kits available under one part number and package

[View Specs](#)
[View Product PDF](#)

| PTO Model | % ENG. | Rotation | Shift Type | MAX. Torque Rating | HP @ 1200 ENG. |
|---------------|--------|----------|------------|--------------------|----------------|
| 249FMLLX-B4AD | 124% | OPP | ELEC./HYD. | 200 Lbs. ft. | 58.0 HP |

Direct Mount Pumps - Pump Flows @ 1200 RPM Engine (Theoretical). Can be Ordered with PTO

| Pump Number | GPM | Pump Number | GPM | Pump Number | GPM |
|----------------------|---------|----------------------|----------|----------------------|----------|
| (16) CGP-P11A016-5GC | 2.4 GPM | (61) CGP-P11A061-5GE | 9.0 GPM | (09) CGP-P31B094-5AG | 14.0 GPM |
| (26) CGP-P11A026-5GC | 3.9 GPM | (71) CGP-P11A071-5GE | 10.6 GPM | (11) CGP-P31B107-5AG | 16.0 GPM |
| (32) CGP-P11A032-5GC | 4.7 GPM | (82) CGP-P11A082-5GE | 12.2 GPM | (15) P16-150A-2D1 | 18.9 GPM |
| (37) CGP-P11A037-5GC | 5.5 GPM | (87) CGP-P11A087-5GE | 12.9 GPM | (18) P16-180A-2D1 | 22.6 GPM |
| (42) CGP-P11A042-5GC | 6.3 GPM | (08) CGP-P31B081-5AG | 12.0 GPM | (20) P16-200A-2D1 | 25.1 GPM |
| (55) CGP-P11A055-5GC | 8.2 GPM | | | | |

890 Series 10-Bolt


[View Specs](#)
[View Product PDF](#)

- Fits Allison 3000/4000 Series Transmissions
- Moves the PTO mounting flange to the rear of the transmission
- Allows direct mounting of larger pumps
- PTO torque ratings up to 670 lbs-ft. – able to transmit the maximum torques allowable from the Allison Transmissions

- Wet spline outputs – extends shaft life and eliminates the need to disassemble the PTO/pump to frequently grease the shaft splines
- Electric Overspeed Control (EOC) available to protect driven equipment from overspeeding
- Heavy duty gears, bearings, shafts and housing – tested to withstand the severest applications such as refuse, cranes and fire/rescue
- Electric/hydraulic shift w/new cartridge valve – better transmission/chassis fitment

| Series | 890*A | 890*E | 890*F |
|---|--------------------------|-------|-------|
| Standard output shaft size | S.A.E. "C" ("XS") Output | | |
| Intermittent torque rating (lbs. ft.) | 600 | 600 | 600 |
| Intermittent torque rating (N.m.) | 813 | 813 | 813 |
| Horserpower rating for intermittent service: at 500 RPM of output shaft (HP) | 57 | 57 | 57 |
| at 1000 RPM of output shaft (HP) | 114 | 114 | 114 |
| at 500 RPM of output shaft (Kw) | 43 | 43 | 43 |
| at 1000 RPM of output shaft (Kw) | 85 | 85 | 85 |
| Approximate weight | 86 lbs. (39 kg) | | |

Power Take-off Chelsea®

442 Series 6-Bolt & 489 Series 8-Bolt


[View 442 Specs](#)
[View 489 Specs](#)

442 Series

- Two-gear
- Engineered to work with virtually all existing transmission applications
- Economical workhorse features a cast iron housing
- Tapered cone bearings for high torque rating and long service life
- Slip fit idler pin for easy interchange from one transmission to another
- Easy to set backlash
- Wide range of shift, output options

489 Series

- Two-gear
- 442 Series family, but with an 8-bolt mounting flange
- No adapter plate needed
- Less installation time, less expense and less chance of leakage
- Wide range of shifters options and pump flanges

[View Product 442 PDF](#)
[View Product 489 PDF](#)

| Series | 442*A 489*A | 442*C 489*C | 442*F 489*F | 442*L 489*L | 442*Q 489*Q | 442*R 489*R | 442*S 489*S | 442*U 489*U | 442*W 489*W | 442*X 489*X |
|--|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Standard output shaft size | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" |
| Intermittent torque rating (lbs. ft) | 250 | 250 | 250 | 250 | 225 | 225 | 200 | 195 | 175 | 140 |
| Horsepower rating for intermittent Service: at 500 RPM of output shaft at 1000 RPM of output shaft | 23.5 47 | 23.5 47 | 23.5 47 | 23.5 47 | 21.4 42.8 | 21.4 42.8 | 19 38 | 18.6 37.2 | 16.7 33.3 | 13.2 26.5 |

870 Series 10- Bolt Powershift



- Torque capacity up to 670 Lbs. ft. / 908 N.m.
- Compact housing height reduces clearance issues
- Integral actuation valve simplifies plumbing and reduces installation time
- Remote mount valve solves installation interference problems
- Electronic Overspeed Control (E.O.C.) protects driven equipment
- Nine speed ratios
- Nine output options
- Wet Spline pump flange extends PTO and pump shaft life

[View Specs](#)
[View Product PDF](#)

| Series | 870*A | 870*B | 870*C | 870*D | 870*E | 870*F | 870*G | 870*H | 870*J |
|--|-----------------------------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| Standard output shaft size | 1 1/2" Spline w/1410 flange | | | | | | | | |
| Intermittent & continuous torque rating (lbs. ft) | 670 | 630 | 590 | 550 | 485 | 430 | 380 | 355 | 335 |
| Intermittent & continuous torque rating (N.m.) | 908 | 854 | 800 | 746 | 658 | 583 | 515 | 481 | 454 |
| Horsepower rating for intermittent service at 500 RPM of output shaft (HP) at 1000 RPM of output shaft (HP) at 500 RPM of output shaft (Kw) at 1000 RPM of output shaft (Kw) | 64 128 | 60 120 | 56 112 | 52 105 | 46 92 | 41 82 | 36 72 | 34 68 | 32 64 |
| Approximate weight | 56 lbs. (25 kg) | | | | | | | | |

Power Take-off Chelsea®

267 Series 10-Bolt



- Approved for use with Allison World Transmissions
- Constant Mesh (non-shiftable) PTO that is ideal for applications requiring continuous power
- Three speed ratios and ten output options

- SuperTorque™ gears available for 20% higher intermittent torque ratings
- No backlash to adjust
- Wet spline output options available

[View Specs](#)
[View Product PDF](#)

| Series | 267*B | 267*G | 267*S | 267*SB | 267SG | 267*SS |
|--|-----------------|-------|-------|--------|-------|--------|
| Standard output shaft size | | | | | | |
| 1 1/4" | | | | | | |
| Intermittent torque rating (lbs. ft.) | 335 | 300 | 250 | 402 | 360 | 265 |
| Intermittent torque rating (N.m.) | 454 | 407 | 339 | 545 | 488 | 359 |
| Horserpower rating for intermittent service: | | | | | | |
| at 500 RPM of output shaft | 32 | 29 | 24 | 38 | 34 | 25 |
| at 1000 RPM of output shaft | 64 | 57 | 48 | 77 | 69 | 50 |
| at 500 RPM of output shaft | 24 | 21 | 18 | 29 | 26 | 19 |
| at 1000 RPM of output shaft | 48 | 43 | 36 | 57 | 51 | 38 |
| Approximate weight | 35 lbs. (16 kg) | | | | | |

340 Series 6-Bolt



- Single low-speed forward and reverse
- Removable cover plate for adjusting backlash
- Shift options include air and lever

- Variety of input gears to cover most applications
- 6-Bolt mounting pad
- Product features and benefits
- Two-year warranty

[View Specs](#)
[View Product PDF](#)

| Series | 340*F |
|---|--------------------|
| Standard output shaft size | 1 1/4" Round w/key |
| Intermittent torque rating (lbs. ft.) | 200 |
| Intermittent torque rating (N.m.) | 271 |
| Horserpower rating for intermittent service | |
| at 500 RPM of output shaft (HP) | 19 |
| at 1000 RPM of output shaft (HP) | 38 |
| at 500 RPM of output shaft (Kw) | 14 |
| at 1000 RPM of output shaft (Kw) | 28 |
| Approximate weight | 32 lbs. (15 kg) |

Power Take-off Chelsea®

348 Series 8-Bolt


[View Specs](#)
[View Product PDF](#)

- Single low-speed forward and reverse
- Removable cover plate for adjusting backlash
- Shift options include air and lever
- Variety of input gears to cover most applications
- 8-Bolt Mounting Pad
- Two-year warranty

| Series | 340*F |
|--|--------------------|
| Standard output shaft size | 1 1/4" Round w/key |
| Intermittent torque rating (lbs. ft) | 200 |
| Intermittent torque rating (N.m.) | 271 |
| Horsepower rating for intermittent service | |
| at 500 RPM of output shaft (HP) | 19 |
| at 1000 RPM of output shaft (HP) | 38 |
| at 500 RPM of output shaft (Kw) | 14 |
| at 1000 RPM of output shaft (Kw) | 28 |
| Approximate weight | 32 lbs. (15 kg) |

523 Series Rear Mount


[View Specs](#)
[View Product PDF](#)

- Continuous torque rating of 350 N.m. or 260 lbs. ft.
- Rear mount design - requires less mounting space and simplifies installation
- No gear back lash to set; Simplifies installation
- Wet spline outputs extend PTO and pump shaft life: Eliminates the need to disassemble to great the mating pump and PTO shafts
- 3 direct mount pump options
- 5 shift options

| Series | 523*T | 523*V |
|---|--------------------|-------|
| Standard output shaft size | 4-Bolt DIN 5462 | |
| Intermittent & continuous torque rating (lbs. ft) | 258 | 258 |
| Intermittent & continuous torque rating (N.m.) | 350 | 350 |
| Horsepower rating for intermittent & continuous service | | |
| at 500 RPM of output shaft (HP) | 25 | 25 |
| at 1000 RPM of output shaft (HP) | 49 | 49 |
| at 500 RPM of output shaft (Kw) | 18 | 18 |
| at 1000 RPM of output shaft (Kw) | 37 | 37 |
| Approximate weight | 12.0 lbs. (5.4 kg) | |

Pumps Piston

P1



- Variable displacement, axial piston pump for open-circuit applications
- Medium pressure, continuous operation at pressures up to 280 bar
- Quiet and efficient control capability
- Low ripple to further reduce noise
- Compact overall package size
- Elastomer seals that eliminate gaskets and external leakage
- High operating efficiency results in lower power consumption and reduced heat generation

[View Specs](#)

[View Product PDF](#)

| Frame size P1 | -018 | -028 | -045 | -060 | -075 | -100 | -140 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 18 1.10 | 28 1.71 | 45 2.75 | 60 3.66 | 75 4.58 | 100 6.1 | 140 8.54 |
| Max continuous pressure (bar) (psi) | 280 4000 |
| Self priming speed @ 1 bar inlet pressure | 3300 | 3200 | 2800 | 2500 | 2400 | 2100 | 2100 |

P2



The P2 Series is a variable displacement piston pump intended for mobile applications, featuring a very compact design, low noise level and low pressure ripple. Stable and quick to respond to system demands, the P2 is designed for cost-effective

installation within the limited space available on modern mobile machines.

- Sealed shaft bearing
- High self-priming speed
- Flexible, reliable, service friendly

[View Specs](#)

[View Product PDF](#)

| Frame size P2 | -060 | -075 | -105 | -145 |
|---|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 60 3.7 | 75 4.6 | 105 6.4 | 145 8.8 |
| Max continuous pressure (bar) (psi) | 317 4600 | 317 4600 | 317 4600 | 317 4600 |
| Self priming speed @ 1 bar inlet pressure | 2800 | 2500 | 2300 | 2200 |

P3



P3 piston pumps are ideal for mobile applications that require high self-priming speed and operating pressure up to 4600 psi. These high performance pumps are suited for mobile applications where inlet fill characteristics are not ideal; i.e. high

altitudes, long inlet lines, cold weather and high pump drive speeds.

- Sealed shaft bearing
- Compact packaging
- Low noise level
- Easy to install
- Flexible, reliable, service friendly

[View Specs](#)

[View Product PDF](#)

| Frame size P3 | -075 | -105 | -145 |
|---|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 75 4.6 | 105 6.4 | 145 8.8 |
| Max continuous pressure (bar) (psi) | 317 4600 | 317 4600 | 317 4600 |
| Self priming speed @ 1 bar inlet pressure | 3000 | 2600 | 2500 |

Pumps Piston

PAVC


[View Specs](#)
[View Product PDF](#)

PAVC piston pumps are ideal for many industrial applications with operating pressure up to 3000 psi. These compact pumps feature convenient cartridge style controls and carry a full pressure rating on most water glycol fluids.

- High strength cast-iron housing
- Built-in supercharger
- High speed capability – 3000 RPM (2600 RPM PAVC100)
- Sealed shaft bearing

- Two piece design for ease of service
- Cartridge bronze clad port plate
- Airbleed standard for quick priming
- Hydrodynamic cylinder barrel bearing
- Thru-shaft (PAVC100 only)
- Full pressure rating on water glycol fluids
- Pump case and shaft seal – see inlet pressure only
- Filter and/or cool drain line (100 psi Max)

| Frame size PAVC | -33 | -38 | -65 | -100 |
|---|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 33 2.0 | 38 2.3 | 65 4.0 | 100 6.1 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 |
| Max self priming speed at 0 psi gauge (RPM) | 3000 | 3000 | 3000 | 2600 |

PVP


[View Specs](#)
[View Product PDF](#)

PVP piston pumps are ideal for medium duty industrial applications with operating pressure up to 3600 psi. These service friendly pumps are quiet and respond quickly to flow demand changes.

- High strength cast-iron housing
- Optional inlet/outlet locations
- Replaceable bronze port plate
- Replaceable piston slipper plate
- Low noise levels
- Fast response times
- Metric pilot, shaft and ports available

| Frame size PVP | -16 | -23 | -33 | -41 | -48 |
|---|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 16 1.0 | 23 1.4 | 33 2.0 | 41 2.5 | 48 2.9 |
| Max continuous pressure (bar) (psi) | 248 3600 | 248 3600 | 248 3600 | 248 3600 | 248 3600 |
| Max self priming speed at 0 psi gauge (RPM) | 3000 | 3000 | 3000 | 2800 | 2400 |

Pumps Piston

Premier


[View Specs](#)
[View Product PDF](#)

The open-loop Premier Series Pumps are variable displacement piston pumps with an emphasis on superior design and few maintenance requirements. Low inlet velocity requirements allow the pumps to run faster than competitive models without the added expense of boosting the inlet. Modified pistons that reduce the amount of trapped fluid volume result in improved efficiency.

The series has been designed to operate in a wide range of industries where variable flow, high pressure and/or high speeds are required; such as: presses, construction machinery, injection molding, wood, aircraft, drilling, mining, steel and cranes.

| Frame Size P | 05/080 | 07/110 | 09/140 | 12/200 | 16/260 |
|---|-------------|--------------|--------------|---------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 80.3 4.9 | 109.8 6.7 | 140.9 8.6 | 200.0 12.2 | 262.2 16.0 |
| Max continuous pressure (bar) (psi) | 414 6000 | 414 6000 | 414 6000 | 414 6000 | 414 6000 |
| Max intermittent pressure (bar) (psi) | 500 7250 | 500 7250 | 500 7250 | 500 7250 | 500 7250 |
| Max rated drive speed (RPM) | 2550 | 2450 | 2300 | 2100 | 1850 |

VP1



The VP1 is the world's first variable displacement pump for truck applications. It can be close-coupled to a gearbox PTO (power take-off) or to a coupling independent PTO (e.g. an engine PTO) which meets ISO standard 7653-1985.

- Variable, load-sense control
- Low noise level
- High power-to-weight ratio
- Compact and lightweight
- Withstands low temperatures
- Sturdy design
- Highly efficient

[View Specs](#)
[View Product PDF](#)

| Frame size VP1 | -45 | -75 | -95 | -130 |
|---|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 45 2.75 | 75 4.58 | 95 5.8 | 12.8 7.8 |
| Max continuous pressure (bar) (psi) | 300 4350 | 300 4350 | 400 5800 | 400 5800 |
| Self priming speed* (RPM) | 2400 | 2100 | 2200 | 1900 |

*2½" suction line

Pumps Piston

F1/F2



F1 fixed displacement piston pumps are widely used on truck applications with operating pressure up to 5000 psi. These lightweight, efficient pumps were designed specifically for truck applications including cargo cranes, hook loaders, forest cranes and concrete mixers.

- Pressures up to 350 bar (5000 psi)
- High power capability
- Twin flow version available
- High self-priming speed
- Easy to install
- Easy to service

[View Specs](#)
[View Product PDF](#)

| Series F1 | 25 | 41 | 51 | 61 | 81 | 101 |
|---|--------------|--------------|--------------|--------------|---------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 25.6 1.59 | 40.9 2.50 | 51.1 3.11 | 59.5 3.66 | 81.6 5.00 | 102.9 6.29 |
| Max operating pressure (bar) (psi) | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 350 5000 |
| Shaft speed (RPM): unloaded at 350 bar ² | 2700 2600 | 2700 2400 | 2700 2200 | 2700 2200 | 2300 20003 | 2300 18003 |
| Torque ¹ at 350 bar (N.m.) (lb-in) | 142 1261 | 227 2016 | 284 2522 | 331 2939 | 453 4023 | 572 5079 |
| Input power, continuous (kW) (hp) | 31 39 | 46 57 | 52 67 | 61 84 | 76 102 | 86 115 |

1 Theoretical value

2 Valid at an inlet pressure of 1.0 bar (abs.) when operating on mineral oil at a viscosity of 30 mm²/s (cSt).

3 Valid with 2½" inlet (suction) line. With 2" suction line: F1-80 – max 1400 RPM. F1-101 – max 1200 RPM.

| Series F2 | 42/42 | 55/28 | 53/53 | 70/35 | 70/70 |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|
| Displacement, Port A/Port B (cm ³ /rev) (in ³ /rev) | 43/41 2.62/2.50 | 55/28 3.36/1.71 | 54/52 3.30/3.17 | 69/36 4.27/2.14 | 68/68 4.15/4.15 |
| Max operating pressure (bar) (psi) | 350 5000 | 350 5000 | 350 5000 | 350 5000 | 300 4350 |
| Max shaft speed, unloaded (RPM) | 2550 | 2550 | 2550 | 2550 | 2550 |
| Max self-priming speed (RPM): Ports A ^{1,2} and B ^{1,2} pressurized Port A ² unloaded, pressure in Port B | 1800 2100 | 1800 2100 | 1800 2100 | 1800 2100 | 1650 2100 |
| Input power, continuous (kW) (hp) | 70 118 | 70 118 | 88 147 | 88 147 | 112 150 |

1 Valid with 2½" inlet line, q = 120 l/min. With 2" inlet line: max 1400 RPM.

2 Measured at 1.0 bar abs. inlet pressure.

Pumps Vane

SDV Single



The SDV Series includes fixed displacement vane pump ideal for low to mid pressure applications. Their compact design and low noise features make them well suited for filter carts, test stands and remote pilot pumps.

- Two compact frame sizes
- Low noise
- 100% tested
- Easy to convert or repair

[View Specs](#)

| Series SDV10 | -1 | -2 | -3 | -4 | -5 | -6 | -7 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 3.3 0.2 | 6.6 0.4 | 9.8 0.6 | 13.1 0.8 | 16.4 1.0 | 19.5 1.2 | 22.8 1.4 |
| Max continuous pressure (bar) (psi) | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 150 2200 | 140 2000 |
| Max speed (RPM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |

| Series SDV20 | -6 | -7 | -8 | -9 | -11 | -12 | -13 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 19.5 1.2 | 22.8 1.4 | 26.5 1.6 | 29.7 1.8 | 36.4 2.2 | 39.0 2.4 | 42.4 2.6 |
| Max continuous pressure (bar) (psi) | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 150 2200 | 150 2200 |
| Max speed (RPM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |

SDV Double



The SDV Series includes fixed displacement vane pumps ideal for low to mid-pressure applications. A double pump provides the flexibility of two different displacements within one housing. Compact design and low-noise features make them well suited for filter carts, test

stands, remote pilot pumps and for hi/lo circuits.

- Two compact frame sizes
- Low noise
- 100% tested
- Easy to convert or repair

[View Specs](#)

| Series SDV2010 | -7 | -8 | -9 | -11 | -12 | -13 |
|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 26.1 - 45.6 1.6 - 2.8 | 29.8 - 49.3 1.8 - 3.0 | 33.0 - 52.5 2.0 - 3.2 | 39.7 - 59.2 2.4 - 3.6 | 42.3 - 61.8 2.6 - 3.8 | 45.7 - 65.2 2.8 - 4.0 |
| Max continuous pressure (bar) (psi) | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 150 2200 | 150 2200 |
| Max speed (RPM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |

*Range calculated by adding displacement for SDV20 to range of displacements for SDV10.

| Series SDV2020 | -7 | -8 | -9 | -11 | -12 | -13 |
|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 42.3 - 52.5 2.6 - 3.2 | 46.0 - 56.2 2.8 - 3.4 | 49.2 - 59.4 3.0 - 3.6 | 55.9 - 72.8 3.4 - 4.4 | 58.5 - 75.4 3.6 - 4.6 | 61.9 - 78.8 3.8 - 4.8 |
| Max continuous pressure (bar) (psi) | 175 2500 | 175 2500 | 175 2500 | 175 2500 | 150 2200 | 150 2200 |
| Max speed (RPM) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |

*Range calculated by adding displacement for SDV20 (shaft end) to range of SDV20 (cover end).

Pumps Vane

T Series

T Series-Single



T Series-Triple

The T Series Fixed Displacement Vane Pump is the highest performance pump of its kind. The balanced design and double lip vane technology are key features in providing a contamination resistant and reliable pump.

- Fixed displacement vane
- Silent technology
- Wide range of displacements
- User-friendly – easy conversions and evolutions
- Wide number of shafts available
- Double shaft seal option possible
- Drive train options available (SAE-A/B/C)

[View Specs](#)

| Frame Size T-Single | 6CM | 6CP | 6DM | 6EM |
|--|--------------------------|-----------------------|-------------------------|---------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 10.8 - 100 0.66 - 6.1 | 46 - 100 2.8 - 6.1 | 47.5 - 158 2.9 - 9.6 | 132.3 - 227 8.1 - 13.8 |
| Max pressure** (bar) (psi) | 275 4000 | 275 4000 | 300 3500 | 240 3500 |
| Max speed** (RPM) | 2800 | 2800 | 2500 | 2200 |

| Frame Size T-Double | 6CCM | 6DCM | 6ECM | 6EDM |
|--|--------------------------|--------------------------|---------------------------|----------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 21.6 - 200 1.3 - 12.2 | 58.3 - 258 3.6 - 15.7 | 143.1 - 327 8.7 - 19.9 | 179.7 - 385 11.0 - 23.5 |
| Max pressure** (bar) (psi) | 275 4000 | 275 4000 | 275 4000 | 275 4000 |
| Max speed (RPM) | 2800 | 2500 | 2200 | 2200 |

| Frame Size T-Triple | 6DCCM | 6EDCM/S |
|--|--------------------------|----------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 69.1 - 358 4.2 - 21.8 | 190.5 - 485 11.6 - 29.6 |
| Max pressure** (bar) (psi) | 275 4000 | 275 4000 |
| Max speed (RPM) | 2500 | 2200 |

*Available range based on various combinations of displacements.

**Lower for larger displacements; see catalog on CD.

Pumps Hybrid/Piston/Cartridge

Variable Piston/Fixed Vane



T6H Series

[View Specs](#)
[View Product PDF](#)

The hybrid pump is a combination of fixed displacement vane pump B, C, D cartridges combined with a variable cartridge of PV20 or PV29 piston pump. The cartridges are driven by a common shaft without coupling in between. They have a large common suction port and two or three independent outlet ports: One for the piston, one or two for the vane pump.

- Very compact
- High pressure ratings
- Low noise
- Independent outlets for fixed and variable flow allow simultaneous cycles
- Internal or external drain
- Choice of controls
- Wide range of acceptable fluids

| Frame Size T6H | T6H20B | T6H20C | T6H29B | T6H29C | T6H29D | T6H29DB |
|--|---------------------------|-----------------------------|----------------------------|-----------------------------|------------------------------|------------------------------|
| Displacement* (cm ³ /rev) (in ³ /rev) | 5.7 - 92.9 2.97 - 5.67 | 10.8 - 142.9 3.28 - 8.72 | 5.7 - 111.9 4.13 - 6.83 | 10.8 - 161.9 4.44 - 9.88 | 47.5 - 219.9 6.68 - 13.42 | 53.2 - 269.9 7.03 - 16.47 |
| Max pressure** (bar) (psi) | 241 3500 | 241 3500 | 207 3000 | 207 3000 | 207 3000 | 207 3000 |
| Max speed** (RPM) | 2600 | 2600 | 2400 | 2400 | 2400 | 2400 |

*Piston pump at full displacement

**Lower for larger displacements. See catalog

Piston Pumps



- Designed for open circuit systems
- Fixed displacement
- Clockwise, counter-clockwise, or bi-directional rotation
- Naturally aspirated to 5000 RPM
- Porting on sides or rear

- Operate efficiently on thin (5 cS) fluid
- Operating temperature: -40° to 300°F

[View Specs](#)
[View Product PDF](#)

| Frame size H | -156 | -206 | -259 | -311 | -346 | -417 | -519 | -692 | -865 |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 0.156 0.0095 | 0.206 0.0126 | 0.259 0.0158 | 0.311 0.0190 | 0.346 0.0211 | 0.417 0.0255 | 0.519 0.0317 | 0.692 0.0422 | 0.865 0.0527 |
| Max continuous pressure (bar) (psi) | 241 3500 | 224 3250 | 207 3000 |
| Max speed (RPM) | 4400 | 4200 | 4000 | 3800 | 3800 | 3700 | 3700 | 3600 | 3500 |

Cartridge Pumps


[View Specs](#)
[View Product PDF](#)

- Three-piston design
- Fixed displacement determined by internal cam angle
- Uni-directional
- Designed to fit specially machined manifolds

| | |
|---|-------------------------------|
| Displacement (cc/rev) (in ³ /rev) | 0.1 to 0.33 0.006 to 0.020 |
| Max continuous pressure (bar) (psi) | 207 3000 |
| Max speed (RPM) | 5000 |

Pumps/Motors Gear

Gerotor Pump and Motor


[View Specs](#)
[View Product PDF](#)

- Gerotor design (HSLT- High Speed/Low Torque)
- Aluminum construction for optimum power to weight ratio
- Bi-directional – designed for fan drive and cut off applications
- High-pressure mechanical seals available for series application to 1000 psi back pressure
- Roller bearings for long life and high OHL capacity
- Buna-N Seals are standard for petroleum and glycol based fluids
- MGG-Motor – Shaft speeds to 5000 RPM
- PGG-Pump – Shaft speeds to 3500 RPM
- Up to 17 HP output for motors

| Frame size MGG2/PGG2 | 0010 | 0016 | 0020 | 0025 | 0030 |
|---|---------------|---------------|---------------|---------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 3.572 .218 | 6.096 .372 | 7.374 .450 | 9.505 .580 | 11.471 .700 |
| Max continuous pressure (bar) (psi) | 138 2000 | 138 2000 | 138 2000 | 138 2000 | 104 1500 |
| MGG2 Max speed at 0 inlet & Max outlet pressure (RPM) | 5000 | 5000 | 5000 | 5000 | 5000 |
| PGG2 Max speed at 0 inlet & Max outlet pressure (RPM) | 3500 | 3500 | 3500 | 3500 | 3000 |

P16 Series



- Aluminum flange and cover
- Cast iron gear plate
- Clockwise or counter-clockwise rotation
- Flows to 38 GPM per section
- Journal bearings
- Available with fluorocarbon seals
- Available in tandem and piggy-back configurations
- Integral priority valve available
- Electric clutches available

[View Specs](#)
[View Product PDF](#)

| Frame size P16 | -45 | -65 | -85 | -100 | -115 | -150 | -180 | -200 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 14.4 0.88 | 20.8 1.27 | 27.3 1.67 | 32.1 1.96 | 36.7 2.24 | 48.1 2.93 | 57.4 3.51 | 63.9 3.90 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 152 2200 | 138 2000 |
| Max speed (RPM) | 3600 | 3600 | 3400 | 3300 | 3100 | 2800 | 2500 | 2200 |

20 Series



- Aluminum or cast iron construction
- Clockwise or counter-clockwise rotation
- Flows to 98 GPM per section
- Journal bearings
- Available with fluorocarbon seals
- Available in tandem and piggy-back configurations
- Available with integral logic valves

[View Specs](#)
[View Product PDF](#)

| Frame size 20 | -150 | -200 | -250 | -300 | -350 | -400 | -450 |
|---|--------------|--------------|--------------|--------------|---------------|---------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 49.5 3.02 | 66.2 4.04 | 82.9 5.06 | 99.1 6.05 | 115.9 7.07 | 132.4 8.08 | 149.1 9.10 |
| Max continuous pressure (bar) (psi) | 172 2500 | 172 2500 | 172 2500 | 172 2500 | 172 2500 | 172 2500 | 172 2500 |
| Max speed (RPM) | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |

Pumps/Motors Gear

25 Series



- Aluminum or cast iron construction
- Clockwise or counter-clockwise rotation
- Flows to 208 GPM per section
- Journal bearings
- Available with fluorocarbon seals
- Available in tandem and piggy-back configurations

[View Specs](#)
[View Product PDF](#)

| Frame size 25 | -300 | -350 | -400 | -450 | -500 | -550 | -660 | -770 | -950 |
|---|--------------|---------------|---------------|---------------|----------------|-----------------|----------------|----------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 99.1 6.05 | 115.9 7.07 | 132.4 8.08 | 149.1 9.10 | 164.7 10.05 | 181.22 11.06 | 219.9 13.42 | 254.4 15.50 | 315.0 19.22 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 172 2500 | 172* 2500* | 172* 2500* | 172* 2500* |
| Max speed (RPM) | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |

*Consult factory

HP7 Series



- Aluminum or cast iron construction
- Clockwise or counter-clockwise rotation
- Flows to 116 GPM per section
- Journal bearings
- Available with fluorocarbon seals
- Available in tandem and piggy-back configurations

[View Product PDF](#)

| Frame size HP7 | -250 | -300 | -350 | -400 | -450 | -500 | -550 |
|---|--------------|--------------|---------------|---------------|---------------|---------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 82.9 5.06 | 99.1 6.05 | 115.9 7.07 | 128.3 7.83 | 143.4 8.75 | 159.8 9.75 | 176.0 10.74 |
| Max continuous pressure (bar) (psi) | 276 4000 | 276 4000 | 276 4000 | 276 4000 | 255 3700 | 228 3300 | 207 3000 |
| Max speed (RPM) | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |

HP8 Series



- Aluminum construction
- Clockwise or counter-clockwise rotation
- Flows to 177 GPM per section
- Journal bearings
- Available with fluorocarbon seals
- Available as tandem pump

[View Product PDF](#)

| Frame size HP8 | -400 | -450 | -500 | -550 | -600 | -660 | -770 | -850 |
|---|---------------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 128.3 7.83 | 143.4 8.75 | 159.8 9.75 | 176.0 10.74 | 193.0 11.78 | 213.9 13.05 | 246.0 15.01 | 268.3 16.38 |
| Max continuous pressure (bar) (psi) | 276 4000 | 276 4000 | 276 4000 | 276 4000 | 276 4000 | 248 3600 | 228 3300 | 207 3000 |
| Max speed* (RPM) | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |

*Speeds above 2000 RPM require the suction to be pressurized to 5 psi minimum.

Pumps/Motors Gear

PGP 300 Series



- Three-piece cast iron construction
- Low friction bushing design
- Single, multiple, piggyback and thru-drive assemblies
- Heavy duty application
- Long life in severe operating environments
- Integrated or bolt-on valve options available
- Direct clutch mount available
- Can be configured as pump or motor

[View Product PDF](#)

| Frame size PGP315/PGM315 | -05 | -06 | -07 | -08 | -10 | -11 | -12 | -13 | -15 | -16 | -17 | -18 | -20 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 10.2 .620 | 12.7 .775 | 15.2 .930 | 17.8 1.09 | 20.3 1.24 | 22.9 1.40 | 25.9 1.55 | 27.9 1.71 | 30.5 1.86 | 33.0 2.02 | 35.6 2.17 | 38.1 2.33 | 40.6 2.48 |
| Max continuous pressure (bar) (psi) | 245 3500 | 225 3500 | 215 3300 | 200 3100 | 190 2900 | 175 2700 | 175 2500 |
| Max speed (RPM) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |

| Frame size PGP330/PGM330 | -05 | -07 | -10 | -12 | -15 | -17 | -20 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 16.1 .985 | 24.2 1.47 | 32.3 1.97 | 40.4 2.46 | 48.4 2.95 | 56.5 3.44 | 64.6 3.94 |
| Max continuous pressure (bar) (psi) | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 225 3250 | 210 3000 |
| Max speed (RPM) | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |

| Frame size PGP350/PGM350 | -05 | -07 | -10 | -12 | -15 | -17 | -20 | -22 | -25 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 20.9 1.28 | 31.3 1.91 | 41.8 2.55 | 52.2 3.19 | 62.7 3.82 | 73.1 4.46 | 83.6 5.10 | 94.0 5.73 | 104.5 6.38 |
| Max continuous pressure (bar) (psi) | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 225 3250 | 210 3000 | 190 2750 | 175 2500 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

| Frame size PGP365/PGM365 | -07 | -10 | -12 | -15 | -17 | -20 | -22 | -25 |
|---|--------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 44.3 2.70 | 59.0 3.60 | 73.8 4.50 | 88.5 5.40 | 103.3 6.30 | 118.0 7.20 | 132.8 8.10 | 147.5 9.00 |
| Max continuous pressure (bar) (psi) | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 245 3500 | 225 3250 | 210 3000 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

*Functioning as motor

Pumps/Motors Gear

PGP 500 Series



- Superior performance
- High efficiency
- Low noise operation at high operating pressures
- International mounts and connections
- Integrated valve capabilities
- Common inlet multiple pump configurations
- Can be configured as a pump or motor

[View Product PDF](#)

| Frame size PGP505/PGM505 | -2 | -3 | -4 | -5 | -6 | -7 | -8 | -9 | -10 | -11 | -12 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 2 .12 | 3 .18 | 4 .24 | 5 .31 | 6 .37 | 7 .43 | 8 .49 | 9 .55 | 10 .61 | 11 .67 | 12 .73 |
| Max continuous pressure (bar) (psi) | 275 3988 | 250 3625 | 250 3625 | 250 3625 | 220 3190 |
| Max speed at 0 inlet & max outlet pressure (RPM) | 4000 | 4000 | 4000 | 4000 | 3600 | 3300 | 3000 | 2900 | 2800 | 2400 | 2400 |

| Frame size PGP511/PGM511 | -6 | -7 | -8 | -10 | -11 | -14 | -16 | -18 | -19 | -21 | -23 | -27 | -28 | -31 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 6 .37 | 7 .43 | 8 .49 | 10 .61 | 11 .67 | 14 .85 | 16 .98 | 18 1.10 | 19 1.16 | 21 1.28 | 23 1.40 | 27 1.65 | 28 1.71 | 31 1.89 |
| Max continuous pressure (bar) (psi) | 275 3988 | 260 3770 | 260 3770 | 235 3408 | 235 3408 | 200 2900 | 190 2705 | 170 2465 |
| Max speed at 0 inlet & max outlet pressure (RPM) | 4000 | 4000 | 4000 | 3600 | 3600 | 3300 | 3000 | 3000 | 3000 | 2800 | 2800 | 2400 | 2300 | 2300 |

Pumps/Motors Gear

PGP 600 Series



610

- Patented, interlocking body design
- 12 tooth gears, bronze thrust plates
- Tandem, triple and cross-frame pumps available
- Common inlets available for tandem and triple pumps
- Continuous operating pressures up to 275 bar
- Production run-in available to suit OEM application conditions and to provide optimized volumetric efficiencies

- Pressure balanced design for high efficiency
- Reduced system noise levels compared to earlier models and competitor's pumps
- High power through-drive capability
- Wide range of integral valves for power steering, power brakes, fan drives and implement hydraulics
- Load-sense and solenoid-operated unloading valves



620



640



620 Tandem

[View Product PDF](#)

| Frame Size PGP/PGM610 | 0070 | 0100 | 0140 | 0160 | 0180 | 0210 | 0230 | 0260 | 0280 | 0320 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cc/rev) (in ³ /rev) | 7 .43 | 10 .61 | 14 .85 | 16 1.04 | 18 1.10 | 21 1.28 | 23 1.40 | 26 1.59 | 28 1.71 | 32 1.95 |
| Continuous pressure (bar) (psi) | 275 3989 | 275 3989 | 275 3989 | 275 3989 | 265 3843 | 245 3553 | 235 3408 | 215 3118 | 200 2901 | 175 2538 |
| Intermittent pressure (bar) (psi) | 300 4351 | 300 4351 | 300 4351 | 300 4351 | 290 4206 | 270 3916 | 260 3771 | 240 3480 | 220 3190 | 175 2538 |

| Frame Size PGP/PGM620 | 0190 | 0230 | 0260 | 0290 | 0330 | 0370 | 0410 | 0440 | 0500 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cc/rev) (in ³ /rev) | 19 1.16 | 23 1.40 | 26 1.59 | 29 1.77 | 33 2.01 | 37 2.26 | 41 2.50 | 44 2.68 | 50 3.05 |
| Continuous pressure (bar) (psi) | 275 3989 | 275 3989 | 275 3989 | 275 3989 | 275 3989 | 250 3626 | 220 3191 | 210 3046 | 210 3046 |
| Intermittent pressure (bar) (psi) | 300 4351 | 300 4351 | 300 4351 | 300 4351 | 300 4351 | 275 3989 | 245 3553 | 230 3336 | 210 3046 |

| Frame Size PGP/PGM640 | 0300 | 0350 | 0450 | 0550 | 0650 | 0750 | 0800 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Displacement (cc/rev) (in ³ /rev) | 30 1.83 | 35 2.14 | 45 2.75 | 55 3.36 | 65 3.97 | 75 4.58 | 80 4.88 |
| Continuous pressure (bar) (psi) | 275 3989 | 275 3989 | 275 3989 | 275 3989 | 275 3989 | 235 3408 | 215 3118 |
| Intermittent pressure (bar) (psi) | 300 4351 | 300 4351 | 300 4351 | 300 4351 | 300 4351 | 260 3771 | 240 3481 |

Pumps/Motors Gear

Cast Iron Roller Bearing Pumps and Motors



- Flows to 128 GPM
- Pressures to 3000 psi
- Speeds to 2400 rpm
- Two-speed valves
- Piggybacks
- Winch motors
- Priority Valves
- Unloader Valve

[View Product PDF](#)

| Frame size PGP020/PGM020 | -05 | -07 | -10 | -12 | -15 | -17 | -20 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 16.1 0.99 | 24.2 1.47 | 32.3 1.97 | 40.4 2.46 | 48.4 2.95 | 56.5 3.44 | 64.6 3.94 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 172 2500 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

| Frame size PGP/PGM/030/031 | -05 | -07 | -10 | -12 | -15 | -17 | -20 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 16.1 0.99 | 24.2 1.47 | 32.3 1.97 | 40.4 2.46 | 48.4 2.95 | 56.5 3.44 | 64.6 3.94 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 172 2500 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

| Frame size PGP/PGM/050/051 | -05 | -07 | -10 | -12 | -15 | -17 | -20 | -22 | -25 |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 20.9 1.28 | 31.3 1.91 | 41.8 2.55 | 52.2 3.19 | 62.7 3.83 | 73.1 4.46 | 83.6 5.10 | 94.0 5.74 | 104.5 6.38 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 172 2500 | 172 2500 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

| Frame size PGP/PGM/075/076 | -07 | -10 | -12 | -15 | -17 | -20 | -22 | -25 | -27 | -30 |
|---|--------------|--------------|--------------|---------------|---------------|---------------|---------------|----------------|----------------|---------------|
| Displacement (cm ³ /rev) (in ³ /rev) | 50.4 3.08 | 67.2 4.10 | 84.0 5.13 | 100.8 6.15 | 117.6 7.18 | 134.4 8.20 | 151.2 9.23 | 168.0 10.25 | 184.8 11.28 | 201.6 12.3 |
| Max continuous pressure (bar) (psi) | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 207 3000 | 172 2500 | 172 2500 | 172 2500 | 138 2000 | 138 2000 |
| Max speed (RPM) | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |

Rotary Actuators

HTR Series, LTR Series, M(Mill) Series

The HTR is a rack and pinion rotary actuator in a compact package, providing high power at low rotational speed. The gearing and cylinders are self-contained and protected against contamination within a precision machined housing that can be integrated into the end user's product. Heavy duty bearings support large externally applied shaft loads. Standard and custom rotations are available with a variety of options.

The LTR Series is suitable for low-pressure applications. High strength alloy steel rack and pinion gearing is combined with lightweight aluminum housings to provide an



HTR Series



LTR Series



M (Mill) Series

[View Product PDF](#)

effective, compact solution over a wide range of rotation and power needs. Three positions of rotation available with a full range of options.

The Mill (M) Series is the non tie rod version of the rack and pinion actuator that provides dependability

features, improved durability and enhanced ease of maintenance. Encompassing a wide range of performance and special features, it offers custom configurations to fit special needs for materials, and performance provisions for power, speed and duty cycle.

| Series | Pressure bar (psi) | Displacement cm ³ /rad (in ³ /rad) | Torque Newton Meter (lb-in) |
|------------------------|-----------------------|---|--------------------------------|
| HTR Series | | | |
| .9 | 207 (3000) | 6 (0.36) | 102 (900) |
| 1.8 | 207 (3000) | 12 (0.7) | 203 (1800) |
| 3.7 | 207 (3000) | 25 (1.5) | 418 (3700) |
| 5 | 207 (3000) | 33 (2.0) | 565 (5000) |
| 7.5 | 207 (3000) | 51 (3.1) | 847 (7500) |
| 10 | 207 (3000) | 65 (4.0) | 1130 (10,000) |
| 15 | 207 (3000) | 93 (5.7) | 1695 (15,000) |
| 22 | 138 (2000) | 145 (8.8) | 1695 (15,000) |
| 30 | 207 (3000) | 186 (11.3) | 3390 (30,000) |
| 45 | 138 (2000) | 290 (17.7) | 3390 (30,000) |
| 75 | 207 (3000) | 480 (29.3) | 8474 (75,000) |
| 150 | 207 (3000) | 960 (58.6) | 16,948 (150,000) |
| 300 | 207 (3000) | 1856 (113.3) | 33,896 (300,000) |
| 600 | 207 (3000) | 3701 (226.0) | 67,791 (600,000) |
| LTR Series | | | |
| 101 | 102 (1500) | 7 (0.40) | 67 (592) |
| 102 | 68 (1000) | 13 (0.80) | 67 (592) |
| 151 | 102 (1500) | 20 (1.20) | 200 (1770) |
| 152 | 102 (1500) | 39 (2.41) | 399 (3530) |
| 201 | 102 (1500) | 46 (2.81) | 479 (4240) |
| 251 | 102 (1500) | 70 (4.30) | 728 (6443) |
| 202 | 102 (1500) | 93 (5.67) | 957 (8470) |
| 252 | 102 (1500) | 141 (8.59) | 1456 (12,885) |
| 321 | 68 (1000) | 187 (11.40) | 1289 (11,407) |
| 322 | 68 (1000) | 374 (22.80) | 2578 (22,813) |
| M (Mill) Series | | | |
| 75 | 207 (3000) | 442 (27) | 8474 (75,000) |
| 150 | 207 (3000) | 901 (55) | 16,948 (150,000) |
| 300 | 207 (3000) | 1836 (112) | 33,896 (300,000) |
| 600 | 207 (3000) | 3669 (224) | 67,791 (600,000) |
| 1000 | 207 (3000) | 5800 (354) | 113,000 (1,000,000) |
| 50000 | 207 (3000) | 285,523 (17,423) | 5,650,000 (50,000,000) |

Rotary Actuators

HRN Series



The HRN Series provides an additional range of vane actuator technology, allowing more options in optimum torque and pressure. Single and double vane options provide high torque in a compact package for the medium-to-high operating pressure range. The rugged construction assures long life and reliability. The units are precision machined from high grade materials and the compact size offers maximum flexibility in mounting and packaging. Unique cushion options are available for applications where control of high inertia loads is critical.

| HRN Series | Pressure bar (psi) | Displacement cm ³ /rad (in ³ /rad) | Torque Newton Meter (lb-in) |
|------------|--------------------|--|-----------------------------|
| 10S | 69 (1000) | 2.12 (0.13) | 9.8 (86.7) |
| 10D | 69 (1000) | 4.14 (0.25) | 19.6 (173.5) |
| 15S | 69 (1000) | 3.61 (0.2) | 19.6 (173.5) |
| 15D | 69 (1000) | 7.00 (0.4) | 39.2 (346.9) |
| 20S | 69 (1000) | 5.09 (0.3) | 29.4 (260.2) |
| 20D | 69 (1000) | 10.19 (0.6) | 58.8 (520.4) |
| 30S | 69 (1000) | 10.82 (0.7) | 58.8 (520.4) |
| 30D | 69 (1000) | 21.65 (1.3) | 117.6 (1040.8) |
| 100S | 69 (1000) | 23.55 (1.4) | 123 (1088.6) |
| 100D | 69 (1000) | 47.11 (2.9) | 245 (2168.3) |
| 200S | 69 (1000) | 46.90 (2.9) | 314 (2779.0) |
| 200D | 69 (1000) | 93.58 (5.7) | 627 (5549.2) |
| 400S | 69 (1000) | 92.31 (5.6) | 539 (4770.4) |
| 400D | 69 (1000) | 184.62 (11.3) | 1078 (9540.7) |
| 700S | 69 (1000) | 165.52 (10.1) | 980 (8673.4) |
| 700D | 69 (1000) | 331.04 (20.2) | 1960.1 (17,346.7) |

[View Product PDF](#)

Tork-Mor Series



The Tork-Mor Series converts fluid pressure to rotational power using vane actuator technology. Torque output is provided within a limited range of rotation, either 100 degrees on a double vane or 280 degrees on a single vane unit. The compact, cylindrically shaped housing can be easily integrated. Bearing capacity is limited and seal bypass leakage flow compensation is required to hold position. Units can be selected with a variety of options for mounting, shaft configuration, seals, stops and switches.

| Tork Mor | Pressure bar (psi) | Displacement cm ³ /rad (in ³ /rad) | Torque Newton Meter (lb-in) |
|----------|--------------------|--|-----------------------------|
| S33 | 34 (500) | 29.48 (1.8) | 90 (800) |
| DS33 | 34 (500) | 58.97 (3.6) | 184 (1625) |
| S42 | 68 (1000) | 60.61 (3.7) | 381 (3370) |
| DS42 | 68 (1000) | 168.71 (10.3) | 762 (6740) |
| S44 | 51 (750) | 106.47 (6.5) | 463 (4100) |
| DS44 | 34 (500) | 298.12 (18.2) | 621 (5500) |
| S46 | 34 (500) | 160.52 (9.8) | 458 (4050) |
| DS46 | 17 (250) | 319.41 (19.5) | 424 (3750) |
| S74 | 68 (1000) | 355.45 (21.7) | 2260 (20,000) |
| DS74 | 51 (750) | 710.89 (43.4) | 3344 (29,600) |
| S77 | 51 (750) | 624.08 (38.1) | 2859 (25,300) |
| DS77 | 51 (750) | 1764.11 (106.6) | 3819 (33,800) |
| S105 | 68 (1000) | 1092.55 (66.7) | 6926 (61,300) |
| DS105 | 68 (1000) | 2186.73 (133.5) | 14,010 (124,000) |
| S108 | 51 (750) | 1746.11 (103.6) | 8022 (71,000) |
| DS108 | 51 (750) | 3490.58 (213.1) | 16,383 (145,000) |
| S1012 | 34 (500) | 2617.52 (159.8) | 7943 (70,300) |
| DS1012 | 34 (500) | 5236.69 (319.7) | 16,044 (142,000) |

[View Product PDF](#)

Valves Open-Center Directional Control

MV3, P70CF/P70CP, V10, V20, V20EH, V70/V90, VA/VG20, VA/VG35, VG35EH



MV3



P70CF/P70CP



V10



V20



V90



VA/VG20



VA/VG35

Parker offers a wide range of open-center directional control valves for mobile markets that also can be used as closed-center, constant-pressure and constant-pressure unloaded valves. Each valve technology offers unique features for improved machine performance and cost.

Parker also provides machine designers with a broad choice of circuitries, spool positioners and port accessories within each valve model. Field-proven differential area and pilot-operated relief valves also are available.

Parker's valve models come with a wide selection of special metering spools designed to optimize machine control and enhance operator comfort. Parker's market experience in machine control will direct you to the right solution.

A full line of pilot controllers with spring packs matched to remote-actuated directional control valves ensures predictable and reliable machine performance. For electrohydraulic operation, all valves are designed to interface with the IQAN electronics package.

BV06, BVB06, BV18, BVCS10

Commercial Valve Components

Gresen Valve Components

P70CF / P70CP

VG20 / VG35

MD04 / MD06

F130

V20EH

VG35EH

V90

MV3

MV4

MV5

MD12

V10

V20

Open-Center Technology

| Series | Max Input Flow LPM (GPM) | Max Work Port Flow LPM (GPM) | Max Pressure psi | Max Pressure bar | Open Center | Closed Center | Constant Pressure Unloaded | Load Sense |
|--------------------|--------------------------|------------------------------|------------------|------------------|-------------|---------------|----------------------------|------------|
| MV3 | 30 (8) | 30 (8) | 3000 | 207 | X | X | | |
| BV06-solenoid only | 38 (10) | 38 (10) | 3000 | 207 | X | | | |
| V10 | 57 (15) | 57 (15) | 3500 | 240 | X | X | | |
| BV18 | 76 (20) | 76 (20) | 3500 | 241 | X | | | |
| P70CF, P70CP | 76 (20) | 76 (20) | 4600 | 315 | X | X | X | X |
| MD06-solenoid only | 95 (25) | 95 (25) | 3000 | 207 | X | | | |
| V20 | 95 (25) | 95 (25) | 3500 | 240 | X | X | X | X |
| V20EH | 95 (25) | 95 (25) | 3500 | 240 | X | X | X | X |
| VA20 VG20 | 170 (45) | 170 (45) | 2500 3500 | 172 240 | X | X | X | |
| VA35 VG35 | 246 (65) | 246 (65) | 2500 3500 | 172 240 | X | X | X | |
| VG35EH | 246 (65) | 246 (65) | 4000 | 275 | X | X | | |
| V90 | 379 (100) | 379 (100) | 3500 | 240 | X | | | |



Valves Load-Sense Directional Control

HV08, K170LS, K220LS, L90LS, M402LS, PC25/55, VP120, VP170, VPL



M402LS



PC25/55



HV08



L90LS



VP120



VPL



K220LS



VP170

[PC25 / PC55](#)[VP170](#)[L90LS](#)[M402LS](#)[VPL Overview](#)[VPL](#)[K220LS](#)[HV08](#)[K170LS](#)[M250LS](#)[VP120 Overview](#)[VP / VPO](#)

Load-Sense – Pre & Post Compensated

| Series | Max Input Flow LPM (GPM) | Max Work Port Flow LPM (GPM) | Max Pressure psi | Max Pressure bar | Load Sense | Load Sense Post-Pressure Compensated | Load Sense Pre-Pressure Compensated |
|--------------|--------------------------|------------------------------|------------------|------------------|------------|--------------------------------------|-------------------------------------|
| V20LS | 114 (30) | 114 (30) | 3500 | 240 | X | | |
| VG80LS | 454 (120) | 379 (100) | 3500 | 240 | X | | |
| M402LS | 500 (132) | 500 (132) | 5440 | 375 | X | | |
| PC25 PC55 | 227 (60) 284 (75) | 170 (45) 246 (65) | 4000 | 275 | | X | |
| VP120 | 159 (42) | 12 (32) | 4650 | 320 | | X | |
| VP170 | 227 (60) | 170 (45) | 5000 | 345 | | X | |
| V86 | 416 (110) | 341 (90) | 3500 | 240 | | X | |
| VPL | 189 (50) | 114 (30) | 5000 | 345 | | | X |
| VP, VPO | 379 (100) | 208 (55) | 4000 | 275 | | | X |
| HV08 | 300 (80) | 250 (65) | 4600 | 317 | | | X |
| L90LS | 151 (40) | 91 (24) | 4600 | 315 | | | X |
| K170LS | 284 (75) | 170 (45) | 3800 | 262 | | | X |
| K220LS | 379 (100) | 220 (58) | 5000 | 345 | | | X |

Valves Hydraulic

Directional Control Valves



- NFPA manifold mounted
- Rugged spools with four control lands; up to 21 spool styles available depending on operator
- Solenoid, lever, cam, air or oil pilot operated
- Soft-shift available on D1 and D3 solenoid operated valves
- Low pressure drop
- Phosphate finish body
- Easy access mounting bolts

Directional Control

| Series | D1SE | D1V | D3V | D31V | D41V | D61V | D81V | D101V | D111V |
|--|---------------|---------------|----------------|-----------------|-----------------|----------------|----------------|-----------------|----------------|
| Maximum flow* (LPM) (GPM) | 20 4 | 83 22 | 150 40 | 175 45 | 2000 528 | 390 100 | 622 180 | 946 250 | 300 79 |
| Max operating pressure (bar) (psi) | 350 5075 | 345 5000 | 345 5000 | 345 5000 | 350 5075 | 207 3000 | 345 5000 | 207 3000 | 350 5075 |
| Mounting style (NFPA) (CETOP) (NG) | D03 3 6 | D03 3 6 | D05 5 10 | D05H 5H - | D10 10 32 | D08 8 25 | D08 8 25 | D10 10 32 | D07 7 16 |

*Depending on spool

Proportional Directional Control Valves



- Standard DIN/ISO/CETOP/NFPA interfaces
- Progressive flow characteristics for improved low flow resolution
- Spring centered spool
- Wide selection of spool options and flow capacity
- Single piece rugged solenoid assembly

D1FW / D*FW*ET

Sandwich Valves



- Mounted between directional control valves and their mounting surface
- Steel bodies and internal hardened steel components for strength and durability

Sandwich Valves

| Series | CM | CPOM | FM | PRDM | PRM | RM | SPC |
|--|---------------------------------|--------------------------------|---------------------------------|---------------------------------------|----------------------|--------------------------------|-------------------|
| Type | Check | P.O. Check | Flow control | Direct operating pressure reducing | Pressure reducing | Pressure relief | Compensator |
| Maximum flow LPM (GPM) D03 Mounting, Size 2 D05 Mounting, Size 3 D08 Mounting, Size 6 | 76 (20) 113 (30) 340 (90) | 53 (14) 76 (20) 227 (60) | 76 (20) 113 (30) 340 (90) | 151 (40) 303 (80) | 64 (17) 189 (50) | 53 (14) 76 (20) 340 (90) | 33 (9) 85 (22) |
| Max optional pressure: (bar) (psi) | 345 5000 | 345 5000 | 345 5000 | 315 4568 | 345 5000 | 345 5000 | 350 5075 |



Valves Hydraulic

Exectrol Directional Control Valves



- One and 2-stage versions
- Shear-type positive seal
- Low leakage (one drop/minute per port)
- Ideal for both hydraulic oil and water soluble fluids
- Standard valves are interflow
- High tolerance to contamination and silting
- Manual overrides standard

- Operating temperature range -40° to +225°F with nitrile o-rings
- One version offers centralized lubricating system
- Self-cleaning and dirt resistant
- Shear-type positive seal

Exectrol

| Series | 21100 | 21200 | 25100 | 25200 | 21353 | 21356 |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Port size | Subplate | Subplate | Subplate | Subplate | 3/8" | 3/4" |
| Maximum flow (LPM) (GPM) | 11.3 3 | 38 10 | 94 25 | 169 45 | 30 8 | 30 8 |
| Working pressure (bar) (psi) | 414 6000 | 414 6000 | 414 6000 | 414 6000 | 310 4500 | 310 4500 |
| Operation solenoid air/oil | X | X | X | X | X X | X X |
| Body material steel aluminum | X | X | X | X | X | X |

Lo-Torq Directional Control Valves



- Shear-type positive seat
- Zero leakage
- High contamination tolerance
- Standard valves are interflow
- Low turning torque

- Side, bottom or subplate mounted
- Panel mounting standard
- Lubricated air, hydraulic oil and water
- Operating temperature -40° to +250°F

Lo-Torq

| Series | 8000E | 8100E | 8000C | 8100C | 8400E | 8500 |
|--|-------------|-------------|-----------------|-----------------|-------------|-------------|
| Size, NPT | 1/8" - 3/4" | 1/8" - 1" | 1 1/4" - 1 1/2" | 1 1/4" - 1 1/2" | 1/8" - 1/4" | 1/8" - 1" |
| Working pressure (bar) (psi) | 207 3000 | 414 6000 | 207 3000 | 414 6000 | 207 3000 | 207 3000 |
| Body material Steel Aluminum alloy | X | X | X | X | X | X |

Valves Hydraulic

Pressure Control Valves



Republic, Manatrol


In-Line Mounted

- Right angle or in-line-style valves
- Pressure ranges between 0.25 and 250 bar (4 and 3600 psi)
- Soft-seat poppets in brass or stainless steel for near zero leaks
- Non-standard and special port styles available on request

Manifold-Mounted

- Pilot operated, normally closed, quick response and spool-type valves available
- Pressure range of 25 to 350 bar (363 to 5075 psi)
- Subplate or slip-in mounting offered
- 2 or 3 adjustment modes

Pressure Control

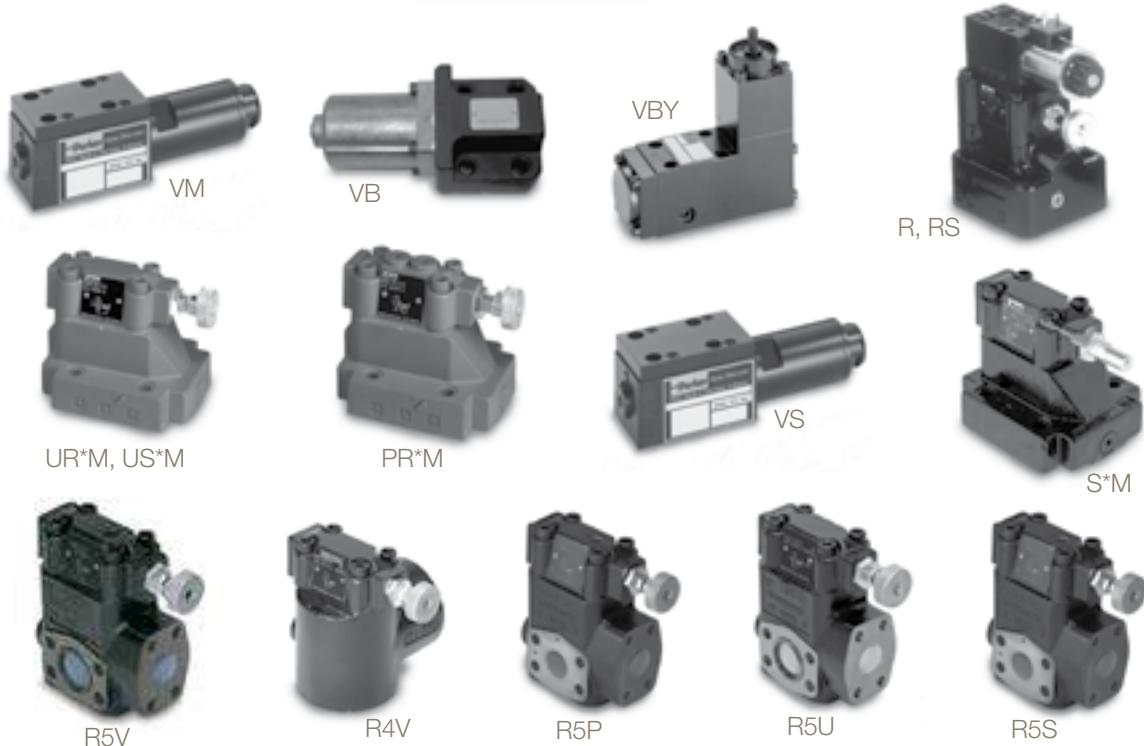

| Series | 620 | 63x | 64x | 665 |
|--|----------------------------|----------------------------|----------------------------|--------------------------|
| Size NPT SAE | 1/4" - 3/4" -4 thru -12 | 1/4" - 3/4" -4 thru -12 | 1/4" - 3/4" -4 thru -12 | 1/4" - 1" -4 thru -16 |
| Direct acting Pilot operated | | | | X |
| Working pressure (bar) (psi) | 0.3 - 248 4 - 3600 | 0.3 - 248 4 - 3600 | 0.3 - 248 4 - 3600 | 0.3 - 248 4 - 3600 |
| Body material aluminum brass stainless steel soft seat | X | X | X | X |

Valves Hydraulic

| Series/Function | R*M | R*R | RS*M | RS*R | PR*M | S*M | UR*M | US*M | VS | VM | VBY | VB |
|--|--------------|----------------|--------------|----------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|
| Relief | X | X | X | X | | | | | X | X | | |
| Sequence | | | | | | X | | | | | X | X |
| Pressure reducer | | | | | X | | | | | | | |
| Unloader | | | | | | | X | | | | | |
| Max operating pressure (bar) (psi) | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 | 350 5075 |
| Maximum flow NG06 LPM (GPM) | | | | | | | | | 25 (7) | 25 (7) | 40 (11) | 25 (7) |
| NG10 LPM (GPM) | 150 (40) | 250 (67) | 150 (40) | 250 (67) | 150 (40) | 150 (40) | 150 (40) | 150 (40) | | 60 (16) | 160 (43) | 60 (16) |
| NG25 LPM (GPM) | 300 (80) | 500 (133.3) | 300 (80) | 500 (133.3) | 350 (80) | 350 (80) | 350 (80) | 350 (80) | | | | |
| NG32 LPM (GPM) | 650 (173) | 650 (173) | 650 (173) | 650 (173) | 650 (173) | 650 (173) | 650 (173) | 650 (173) | | | | |

| Series/Function | R5V | R5R | R5U | R5S | R5A | R5P | R4V |
|---|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|---------------------------------|---------------------------------|--------------------------------------|
| Relief | X | | | | | | |
| Sequence | | | | X | | | X |
| Pressure reducer | | X | | | | | |
| Unloader | | | X | | | | |
| Compensator | | | | | X | X | |
| Max operating pressure (bar) (psi) | 210, 280, 350 3045, 4060, 5075 | 280, 350 3045, 4060, 5075 | 280, 350 3045, 4060, 5075 | 210, 280, 350 3045, 4060, 5075 |
| Maximum flow (in-line) SAE 8 LPM (GPM) | | | | | | | 90 (23.7) |
| SAE 16 LPM (GPM) | | | | | | | 300 (79.2) |
| SAE 12 LPM (GPM) | | | | | | | 300 (79.2) |
| SAE 20 LPM (GPM) | | | | | | | 600 (158.5) |
| Maximum flow (flange) | | | | | | | |
| SAE 3/4" LPM (GPM) | 90 (24) | 90 (24) | 90 (24) | 90 (24) | 90 (24) | 90 (24) | 90 (24) |
| SAE 1" LPM (GPM) | 300 (79) | 300 (79) | 300 (79) | 300 (79) | 300 (79) | 300 (79) | 300 (79) |
| SAE 1 1/4" LPM (GPM) | 600 (159) | 600 (159) | 600 (159) | 600 (159) | 600 (159) | 600 (159) | 600 (159) |
| SAE 1 1/2" LPM* (GPM) | 600 (159) | 600 (159) | 600 (159) | 600 (159) | | | |

*3-port body only

Valves Hydraulic

Check Valves



Seal, Flow, Check

Republic, Manatrol

Colorflow

| Series | C | VCL | CP | LT, LTF | VLS | 440, 450 | 480, 490 | 580, 590 |
|---|--|-----------------------------|---------------------------|---------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Type | Check | Check | P.O. Check | Line Throttle | Velocity Fuse | High Press. | Soft Seat | Swing |
| Max flow range (LPM) (GPM) | 11 - 569 3 - 150 | 23 - 189 5 - 50 | 30 - 95 8 - 25 | | 2 - 341 .5 - 90 | | | |
| Body material: brass aluminum steel stainless steel | X X X | | X | X | X | X X X | X X X | X |
| Port types/sizes: NPT SAE BSPP BSPT JIC | 1/8" - 2" -4 thru -32 1/8" - 2" 1/8" - 3/4" | 1/4" - 1 1/4" 3/8", 3/4" | 3/8", 3/4" -8 thru -12 | 1/2", 3/4" -8 thru -12 | 3/8" - 1" -6 thru -24 | 1/8" - 2" -4 thru -32 | 1/8" - 2" -4 thru -32 | 1/8" - 2" -4 thru -32 |
| Max operating press (bar) (psi) | 345 5000 | 210 3045 | 210 3045 | 210 3045 | 210 3045 | 345 5000 | 210 3045 | 24 350 |

| Series | C5P | C5V | D4S | D5S | J416A, J417A | Pneu | AVF Hyd |
|--|-----------------------|-----------------------|-----------------------|-----------------------|--------------------------|----------------|-------------------|
| Type | P.O. Check | Check | Check | Check | Mini | | Velocity Fuse |
| Max flow range (LPM) (GPM) | 180 - 600 48 - 159 | 100 - 700 27 - 185 | 180 - 585 48 - 155 | 180 - 585 48 - 155 | 4 - 110 1 - 29 | 5 - 60 SCFM | 2 - 227 2 - 60 |
| Body material: brass aluminum steel stainless steel | X | X | X | X | | X | X |
| Port types/sizes: NPT SAE BSPP BSPT JIC SAE 61 SAE 62 | | | | | -4 thru -16 1/4" - 1" | 1/4" - 3/4" | 1/4" - 1" |
| Subplate | | | 3/8", 3/4", 1 1/2" | 3/8", 3/4", 1 1/2" | | | |
| Max operating press (bar) (psi) | 350 5075 | 420 6090 | 350 5075 | 350 5075 | 345 5000 | 136 1973 | 340 4930 |

Valves Hydraulic

Auxiliary Valves



- Small dimensions
- Easy to install
- Hardened and ground parts
- High stability

QDS6

VV6

PRS6

PLD6 / PLD130

PLC

| Series | Valve Type | Max Working Pressure bar (psi) | Max Setting Pressure bar (psi) | Flow Capacity LPM (GPM) |
|--------|-------------------------------|--------------------------------|--------------------------------|-------------------------|
| PLC | Direct-Acting pressure relief | 241 (3500) | 420 (6000) | 350 (93) |
| PLD | Direct-Acting pressure relief | 241 (3500) | 300 (4350) | 40 (11) |
| PRS6 | Pressure reducing | 241 (3500) | 250 (3625) | 30 (8) |
| QDS6 | Sequence, 3-way | 241 (3500) | 250 (3625) | 20 (5.3) |
| VV6 | Shuttle | 345 (5000) | 250 (3625) | 20 (5.3) |

Ball Valves



- Designed for hydraulic, pneumatic and other media
- Fully ported for low pressure drop and maximum system efficiency
- Polyamide thrust bearing and ball seal compounds
- Low actuation torque and high cycles

- Assortment of port configurations including threaded, manifold mounted, SAE split flange and a unique 4-bolt rotating SAE flange
- Options include locking handles, panel mounting and limit switches

Ball

| Series | Function | Pressure bar (psi) | Port Sizes | Material |
|------------------------|---------------------|--------------------|-------------|--------------------------|
| High Pressure | | | | |
| BVHP | 2-Way | 414 (6000) | 1/4" - 1" | Steel or Stainless Steel |
| BVAH | 2-Way | 414 (6000) | 1 1/4" - 4" | Steel or Stainless Steel |
| BVHH | 2-Way | 689 (10,000) | 1/2" - 2" | Steel or Stainless Steel |
| BV3H/BV4H | 3 & 4-Way | 414 (6000) | 1/4" - 2" | Steel or Stainless Steel |
| BVMM | 2 & 3-Way | 414 (6000) | 1/4" - 2" | Steel or Stainless Steel |
| Medium Pressure | | | | |
| BV3D | 3-Way (diverter) | 207 (3000) | 1/4" - 2" | Steel or Stainless Steel |
| V500CS | 2-Way | 138 (2000) | 1/4" - 1" | Steel |
| V502SS | 2-Way | 138 (2000) | 1/4" - 2" | Stainless Steel |
| Low Pressure | | | | |
| BVAL | 2-Way (suction) | 28 (400) | 1/4" - 4" | Aluminum |
| V500P | 2-Way | 41 (600) | 1/4" - 2" | Brass |
| V590P | 2-Way (right angle) | 17 (250) | 1/4" - 1/2" | Brass |



Valves Hydraulic

Mobile Accessories



- Flow controls, flow dividers, pilot operated check valves, relief valves, selector valves and bankable/stackable directional control valves
- Flows to 225 LPM (60 GPM)
- Pressures to 207 bar (3000 psi)
- Cast iron bodies

Mobile Accessories

| Series | Function | Pressure Flow | Pressure (SAE Porting) | Pressure (NTPF Porting) |
|-----------------------|----------------------------------|--|------------------------|-------------------------|
| CFD | Priority-type flow control | 56 Liters/Min (15 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| CFDA | P.C., Priority-type flow control | 56 Liters/Min (15 GPM) | 172 bar (2500 psi) | 138 bar (2000 psi) |
| DC | P.C., Priority-type flow control | 98 Liters/Min (26 GPM) | 241 bar (3500 psi) | 138 bar (2000 psi) |
| PD/PDC | Flow divider/combiner | 75 Liters/Min (20 GPM) | 172 bar (2500 psi) | 138 bar (2000 psi) |
| LO | Sgl./Dbl. pilot operated check | 94 Liters/Min (25 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| LOA | Sgl./Dbl. pilot operated check | 38 Liters/Min (10 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| WJL | Diff. area poppet relief | 94 Liters/Min (25 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| RPJL | Pilot operated relief | 94 Liters/Min (25 GPM) | 345 bar (5000 psi) | 138 bar (2000 psi) |
| RPL | P.O. poppet type relief | 225 Liters/Min (60 GPM) | 345 bar (5000 psi) | 138 bar (2000 psi) |
| DXV | Ball-type crossover relief | 38 Liters/Min (10 GPM) | 172 bar (2500 psi) | 138 bar (2000 psi) |
| DWV | Diff. area crossover relief | 113 Liters/Min (30 GPM) | 345 bar (5000 psi) | 138 bar (2000 psi) |
| HP 20 | Hydraulic pilot pressure | 75 Liters/Min (20 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| HP 50 | Hydraulic pilot pressure | 188 Liters/Min (50 GPM) | 345 bar (5000 psi) | 138 bar (2000 psi) |
| S-50 S-75 S-100 | Manual selector | 75 Liters/Min (20 GPM) 113 Liters/Min (30 GPM) 225 Liters/Min (60 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| SM | Manual selector | 75 Liters/Min (20 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| HM | Manual selector | 38 Liters/Min (10 GPM) | 172 bar (2500 psi) | 138 bar (2000 psi) |
| DS12,71,75 | Manual double selector valve | 94 Liters/Min (25 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |
| CFQ | Priority-type flow control | 113 Liters/Min (30 GPM) | 207 bar (3000 psi) | 138 bar (2000 psi) |

Valves Hydraulic

Flow Control Valves



- Pressure and temperature compensated valves available
- Controlled flow in one or both directions
- Simple set screw locks valve settings
- Versions available with Colorflow scales
- Reverse flow checks optional on several valves
- Variety of metering needles
- Versions offered with tamper-proof option

| Series | F | PC*K |
|--|---------------------|-------------------|
| Type | Flow | PC flow |
| Max flow (LPM) (GPM) | 11 - 569 3 - 150 | 11 - 95 3 - 25 |
| Body material | | |
| Brass | X | |
| Steel | X | |
| Stainless steel | X | X |
| Port types/sizes | | |
| NPT | 1/8" - 2" | 1/4" - 3/4" |
| SAE | -4 thru -32 | -6 thru -12 |
| BSPP | 1/8" - 2" | |
| BSPT | 1/8" - 3/4" | |
| Max operating press (bar) (psi) | 345 5000 | 210 3045 |

Republic, Manatrol

Colorflow

Flow, Check

| Series | PC*M | PC*MS | TPC | FG3PKC | N | MVI | MV | D | 2F1C |
|--|--------------------|--------------------|---------------------|----------------|--------------------|------------------------------|--------------------|--------------------------|-------------|
| Type | PC flow | PC flow | T & PC flow | T & PC flow | Needle | Cartridge Needle | Metering | Deceleration | PC flow |
| Max flow (LPM) (GPM) | 11 - 189 3 - 50 | 11 - 189 3 - 50 | 3.8 - 95 .1 - 25 | 41.3 11 | 11 - 265 3 - 70 | 2 - 95 .5 - 25 | 4 - 110 .5 - 40 | 72 - 227 19 - 60 | 110 29 |
| Body material | | | | | | | | | |
| brass | X | | | X | X | X | X | X | X |
| steel | X | | | X | X | X | X | X | X |
| stainless steel | | | | | | | | | |
| Port types/sizes | | | | | | | | | |
| NPT | 1/4" - 1 1/4" | | | 3/8", 3/4" | | 1/8" - 1 1/4" -4 thru -20 | 1/4" - 3/4" | 1/8" - 1" -4 thru -16 | 3/8", 3/4" |
| SAE | -6 thru -16 | | | | | 1/4" - 1/2" | | 1/8" - 1" 1/4" - 1/2" | |
| BSPP | | | | | | | | | |
| BSPT | | | | | | | | | |
| Subplate | | 1/4" - 1" | | 3/8" | | | | | 3/8", 3/4" |
| Max operating press (bar) (psi) | 210 3045 | 210 3045 | 210 3045 | 210 3045 | 345 5000 | 345 5000 | 345 5000 | 210 3045 | 350 5075 |

Industrial Accessories and Plug Valves



- Valves isolate the gage from damage and pressure surges
- Pressure snubber offers one-piece construction; no maintenance
- Some valves provide partial snubbing while delivering instant pressure
- Spring-loaded spool on specific valves drains fluid to reservoir

- No power source required for double-acting, hand operated pumps
- Certain valves flange mount in any position

Industrial Accessories, Plug



Valves Remote Control Systems

Hydraulic



PCL4



PCL4-N

PCL4

The PCL4 is a hydraulic pilot system for the proportional remote control of directional valves, pumps, motors, etc. It is available with coordinate lever-units, as well as linear units for hand or foot control. The PCL4 is intended primarily for the remote control of hydraulically operated spool actuators and pump regulators in all kinds of mobile and industrial applications.

All connection ports can be obtained with G¹/₄", M14x1.5 or 9/16" UNF connection threads. The coordinate valve is available in a version with all connections in the base plate. Up to 6 linear units can be built together in a block.

| System Type | Hydraulic Pilot Pressure |
|---|--------------------------|
| Control pressure range | 1 – 69 bar (14–1000 psi) |
| Control flow | Max 4 LPM (1 GPM) |
| Individual control characteristics for each direction | X |
| Selectable start and final pressures | X |
| Selectable lever force | X |
| Curves with straight characteristics | X |
| Curves with two-step characteristics | X |
| Curves with forced opening (final step) | X |
| Friction brake for retention in any position | X |
| Mechanical or electromagnetic end-position detent | X |

Pneumatic



VP04

VP04

The VP04 is a pneumatic pilot valve for the proportional remote control of directional valves, positioning cylinders, etc. Either linear or coordinate-lever versions of the VP04 are available.

All connections are furnished with couplings of the plug-in type. The signal ports can be obtained for 6 mm or 1/4" O.D. hoses. The primary ports and tank ports are available in 6 mm, 8 mm, 1/4" or 5/16" I.D.

Principal applications include the proportional remote control of pneumatic spool-actuators and positioning cylinders in mobile or industrial hydraulic systems.

| System Type | Pneumatic Pilot Pressure |
|--|--------------------------|
| Control pressure range | 0 – 8 bar (0 – 115 psi) |
| Control flow | Max 7 NI/s (14.8 cfm) |
| Control curves with straight characteristics | X |
| Mechanical end-position detent | X |

Valves Threaded Cartridge

Threaded Cartridge Valves



Parker offers the broadest line of threaded cartridge valves, specialty valves and integrated packages in the industry. Parker is staffed with experienced cartridge and application engineers to design and specify products to meet customer applications.

Product Highlights

- Standard cavities sizes from 4–20
- Pressures to 420 bar (6000 psi)
- Flows up to 378 LPM (100 GPM)
- Steel and aluminum line bodies
- RESILON™ D-Ring Seal eliminates need for back-up rings; improves wear, extrusion and spiral failure resistance (Winner's Circle)
- Spherical poppet design assures accurate alignment and reduces leakage rating on many valves
- New crimp design eliminates adhesive between adapter and cage
- Custom manifolds available

- Products hex-chrome free zinc plated
- Adjustment options for pressure & flow controls

Solenoid Valves

- Optional manual overrides
- SUPER COIL exceeds IP69K specifications
 - Water dunk test qualified
 - Endurance tested
 - Water spray and chemical solvent compatibility
 - 10 standard termination options (and many specials)
 - Many DC and AC voltages available

Bodies and Cavities

| Parker standard | industry standard, -4 through -20 sizes |
|-----------------|---|
| Counterbalance | single and dual |
| Cavity plugs | -8, -10, -12, -16 sizes |
| Special bodies | unique Sterling and Waterman bodies |

Check Valves

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|---------------------|-------------------------|--------------------------------|
| Poppet/ball type | 500 (132) | 420 (6000) |
| Pilot operated | 150 (40) | 420 (6000) |
| Dual pilot operated | 190 (50) | 350 (5000) |

Coils and Electronics

| | |
|------------|---|
| Supercoils | IP69K, standard voltages, molded connectors |
|------------|---|

Directional Controls

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|----------------------|-------------------------|--------------------------------|
| Pilot operated spool | 400 (105) | 420 (6000) |

Flow Controls

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|-------------------------------|-------------------------|--------------------------------|
| Needle valves | 225 (60) | 420 (6000) |
| Pressure compensated | 56 (15) | 420 (6000) |
| Pressure compensated priority | 150 (40) | 420 (6000) |
| Flow dividers/combiners | 320 (85) | 420 (6000) |

Valves Threaded Cartridge

Load Motor Controls

| Valve Type | Flow Capacity Liters/Min (GPM) | Max Working Pressure bar (psi) |
|-------------------------|--------------------------------|--------------------------------|
| Standard pilot assisted | 350 (90) | 350 (5000) |
| Vented to atmosphere | 180 (48) | 350 (5000) |

Logic Elements

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|------------|-------------------------|--------------------------------|
| Poppet | 303 (80) | 240 (3500) |
| Spool | 500 (132) | 420 (6000) |

Manual Valves

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|------------|-------------------------|--------------------------------|
| Poppet | 45 (12) | 350 (5000) |
| Spool | 17 (5) | 350 (5000) |

Pressure Controls

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|-------------------------|-------------------------|--------------------------------|
| Direct acting relief | 100 (26) | 420 (6000) |
| Pilot operated relief | 400 (106) | 420 (6000) |
| Direct acting sequence | 47 (12) | 420 (6000) |
| Pilot operated sequence | 160 (42) | 420 (6000) |
| Direct acting reducing | 56 (13) | 420 (6000) |
| Pilot operated reducing | 150 (40) | 350 (5000) |

Proportional Valves

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|---------------------|-------------------------|--------------------------------|
| Pressure relieving | 95 (25) | 350 (5000) |
| Pressure reducing | 30 (8) | 210 (3000) |
| Flow controls | 325 (60) | 210 (3000) |
| Directional control | 38 (10) | 350 (5000) |

Shuttle Valves

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|------------|-------------------------|--------------------------------|
| Insert | 38 (10) | 420 (6000) |
| Cartridge | 50 (13) | 420 (6000) |
| Spool | 175 (46) | 420 (6000) |

Solenoid Valves

| Valve Type | Flow Capacity LPM (GPM) | Max Working Pressure bar (psi) |
|------------|-------------------------|--------------------------------|
| Spool | 285 (75) | 350 (5000) |
| Poppet | 113 (30) | 350 (5000) |



Valves Integrated Hydraulic Circuits

Integrated Hydraulic Circuits



Integrated hydraulic circuits (hydraulic manifold blocks) are designed to meet the many demands on mobile hydraulic equipment. Manifold blocks offer the following benefits:

- Minimum number of tubing, hoses and couplings
- Fewer overall components
- Fewer leakage points
- Less space required
- Complete system solution with optimized functions

Additionally, manifold blocks can be flanged to one or more directional valves as well as to pumps, cylinders, motors and filters.

Some cartridge valve products offered include:

- Directional control valves
- Logic elements and flow controls
- Pressure controls
- Proportional valves
- Powershift transmission controls
- Load holding valves
- Check and shuttle valves

Parker offers value-added services such as manifold design using in 3-D CAD and CAM software, application engineering assistance, and assembly and testing capabilities.

Expert application engineers and the latest computer-aided design technology can deliver advanced, custom products to market faster. The solution is only minutes away with Parker's quick design proposals that are created using 3-D CAD.

Once the design is finalized, the process is further streamlined by using electronic communications and approvals. When design specifications meet customer requirements, Parker's CAD-linked prototype machining centers go into motion producing fully functional hydraulic integrated circuits. All prototypes are then fully tested and documented before being released to production. In today's highly competitive market, speed and quality are critical for success.

Cartpak CETOP-3 Modules



- Standard ISO4401-03, NFPA D03, CETOP3 size bodies designed to accept common -10 size cavity cartridge valves
- Mounted between D1 Series valves and their mounting surface
- Aluminum body for 210 bar (3000 psi) operation; ductile iron body for 350 bar (5000 psi) operation
- Each Cartpak body offers a wide range of hydraulic control functions

- Functions include:
 - Pressure relief
 - Pressure reducing
 - Pressure sequencing
 - Flow control
 - Directional control (two-way, three-way)
 - Proportional flow control
 - Proportional pressure control

Mobile Hydraulics

Innovative Products and System Solutions

When it comes to hydraulic components and solutions, no company offers more than Parker. Get a jump on the next solution by contacting Parker today.

Sales

Call: 1-800-C-PARKER (800-272-7537)

Distributor Locator

Call: 1-800-C-PARKER

Online: www.parker.com/distloc

Literature

Call: 1-800-C-PARKER

e-mail: c-parker@parker.com

Online: www.parker.com/hydraulics

Training Software and Training Programs

Call: 216-896-2495

Online: www.parker.com/training

Mobile Hydraulics Innovative Products and System Solutions Web Interactive

Parker's Mobile Hydraulics Innovative Products and System Solutions Web Interactive can be viewed on-line at www.parker.com/mobilesolutionsguide. In addition to the summary produced for this printed guide, the mobile hydraulics solutions web interactive links to detailed product bulletins in each category and are available for individual or mass download.



www.parker.com/hydraulicsgroup





Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 C-Parker (1 800 272 7537)



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes

Climate Control

Key Markets

Agriculture
Air conditioning
Construction machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves

Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydrostatic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions

Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & dryers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings

Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors

Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors

Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves

Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration damping

ENGINEERING YOUR SUCCESS.

Sales Offices

Argentina, Buenos Aires
Tel: (54) 33 2744 4129

Australia, Castle Hill
Tel: (61) 2 9634 7777

Austria, Wiener Neustadt
Tel: (43) 2622 23501 0

Belgium, Nivelles
Tel: (32) 67 280 900

Brazil, Cachoeirinha RS
Tel: (55) 51 3470 9144

Canada, Milton, Ontario
Tel: (905) 693 3000

China, Beijing
Tel: (86) 10 6561 0520

China, Shanghai
Tel: (86) 21 5031 2525

Czech Republic and Slovakia,
Klecany
Tel: (420) 284 083 111

Denmark, Ballerup
Tel: (45) 4356 0400

Finland, Vantaa
Tel: (358) 20 753 2500

France, Contamine-sur-Arve
Tel: (33) 4 50 25 80 25

Germany, Kaarst
Tel: (49) 2131 4016 0

Greece, Athens
Tel: (30) 210 933 6450

Hong Kong
Tel: (852) 2428 8008

Hungary, Budapest
Tel: (36) 1 220 4155

India, Mahape, Navi Mumbai
Tel: (91) 22 6513 7081

Ireland, County Dublin, Baldonnel
Tel: (353) 1 466 6370

Italy, Corsico, Milano
Tel: (39) 02 45 19 21

Japan, Tokyo
Tel: (81) 3 6408 3900

Korea, Seoul
Tel: (82) 2 559 0400

Malaysia, Subang Jaya
Tel: (60) 3 5638 1476

Mexico,
Toluca, Edo. de Mexico
Tel: (52) 72 2275 4200

The Netherlands, Oldenzaal
Tel: (31) 541 585000

New Zealand, Mt. Wellington
Tel: (64) 9 574 1744

Norway, Ski
Tel: (47) 64 91 10 00

Poland, Warsaw
Tel: (48) 22 57 32400

Portugal, Leca da Palmeira
Tel: (351) 22 999 7360

Romania, Bucharest
Tel: (40) 21 252 1382

Russia, Moscow
Tel: (7) 495 645 2156

Singapore, Jurong Town
Tel: (65) 6 887 6300

Slovenia, Novo Mesto
Tel: (386) 7 337 6650

South Africa, Kempton Park
Tel: (27) 11 961 0700

Spain, Madrid
Tel: (34) 91 675 7300

Sweden, Spånga
Tel: (46) 8 597 95000

Taiwan, Taipei
Tel: (886) 2 2298 8987

Thailand, Bangkok
Tel: (662) 717 8140

Turkey, Istanbul
Tel: (90) 212 482 9106

Ukraine, Kiev
Tel: (380) 44 494 2731

United Arab Emirates, Abu Dhabi
Tel: (971) 2 678 8587

United Kingdom, Warwick
Tel: (44) 1926 317878

USA, Lincolnshire, IL
Tel: (847) 821 1500

