

13 Displacements 13 Schluckvolumen 13 Cylindrée 13 Desplazamientos	(8.6 to 58.5 in ³ /rev) 141 ... 959 cm ³ /rev
Maximum Pressure Eingangsdruck Pression entrée Presion Maxima	Cont. (3000 psid) ... 207 bar Int. (4000 psid) ... 276 bar
Maximum Oil Flow Schluckstrom Débit d'huile Caudal Maximo de Aceite	(30 gpm) ... 114 lpm
Maximum Speed Drehzahl Vitesse de rotation Velocidad Maxima	(660 rpm) 660 rpm
Maximum Torque MaxDrehmoment Couple Torque Maximo	Cont. (9,239 lb in) 1044 Nm Int. (12,636 lb in) 1428 Nm
Maximum Side Load at Key Seitenlast Charges latérales Carga Maxima Lateral	(4790 lb) ... 21306 N

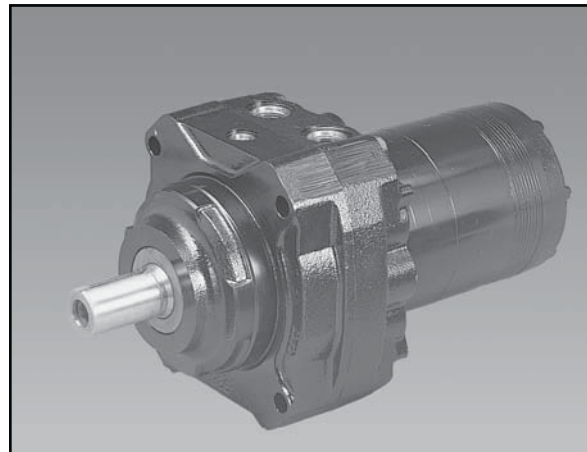


CAUTION!

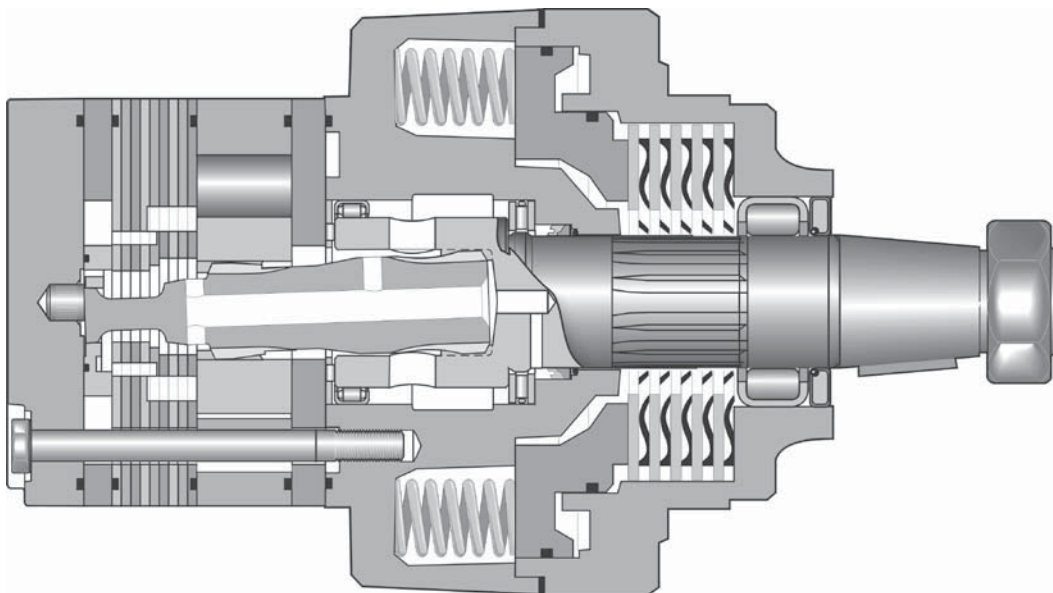
See installation/operating instructions for product cautions and proper use.







Exceptional Strength and Durability in a High Performance Motor/Brake Package

This brake motor consists of a BH Series motor integrated into a wet disc, spring applied, hydraulically released brake. Standard holding capacity is 16,000 lb in of holding torque. The brake is front mounted for reliable operation even in the event of a system failure. The brake release port is capable of pressures to 3000 PSI.



Rated Brake Holding Capacity @ Zero Release Pressure Nm (in-lbs)	Maximum Full Release Pressure bar (PSI)
1800 (16,000)	22 (315)
16,000 in-lbs is standard holding capacity. For other holding capacities, consult the factory for price and availability.	



BH		XXXX		X		XX		0		XXXX																																																			
Series		Displacement Schluckvolumen Cylindrée Desplazamiento		Mounting/Ports Gehäuse/Anschluß Carter/Plan de raccordement Montaje/Lumbreras		Shaft Welle Arbre Eje		Rotation Drehrichtung Direction de rotation Rotacion		Options Opciones																																																			
<table border="1"> <thead> <tr> <th>Code</th> <th>cm³/U cm³/tr cm³/giro in³/rev</th> </tr> </thead> <tbody> <tr><td>0140</td><td>141 / 8.6</td></tr> <tr><td>0170</td><td>169 / 10.3</td></tr> <tr><td>0195</td><td>195 / 11.9</td></tr> <tr><td>0240</td><td>238 / 14.5</td></tr> <tr><td>0280</td><td>280 / 17.1</td></tr> <tr><td>0310</td><td>310 / 18.9</td></tr> <tr><td>0335</td><td>337 / 20.6</td></tr> <tr><td>0405</td><td>405 / 24.7</td></tr> <tr><td>0475</td><td>477 / 29.1</td></tr> <tr><td>0530</td><td>528 / 32.3</td></tr> <tr><td>0625</td><td>623 / 38.0</td></tr> <tr><td>0785</td><td>786 / 48.0</td></tr> <tr><td>0960</td><td>959 / 58.5</td></tr> </tbody> </table>		Code	cm³/U cm³/tr cm³/giro in³/rev	0140	141 / 8.6	0170	169 / 10.3	0195	195 / 11.9	0240	238 / 14.5	0280	280 / 17.1	0310	310 / 18.9	0335	337 / 20.6	0405	405 / 24.7	0475	477 / 29.1	0530	528 / 32.3	0625	623 / 38.0	0785	786 / 48.0	0960	959 / 58.5	<table border="1"> <thead> <tr> <th>Code</th> <th>Shaft</th> </tr> </thead> <tbody> <tr> <td>31*</td> <td>1 1/2" J501 Taper[†] </td> </tr> <tr> <td>32</td> <td>1 1/2" Keyed </td> </tr> </tbody> </table> * Castle nut available on Tapered Shafts Only. Ecrou a creneaux degages disponible pour l'arbre conique seulement Solo eje conico viene con tuerca entallada [†] See installation instructions.		Code	Shaft	31*	1 1/2" J501 Taper [†] 	32	1 1/2" Keyed 	<table border="1"> <thead> <tr> <th>Code</th> <th>Mounting/Ports</th> </tr> </thead> <tbody> <tr> <td>AS</td> <td>Front Mtg/Front Bolting 1/2-13 UNC Thd, 7/8-14 SAE  </td> </tr> <tr> <td>CS</td> <td>Rear Mtg/Thru Bolting, 7/8-14 SAE  </td> </tr> </tbody> </table>		Code	Mounting/Ports	AS	Front Mtg/Front Bolting 1/2-13 UNC Thd, 7/8-14 SAE  	CS	Rear Mtg/Thru Bolting, 7/8-14 SAE  	<table border="1"> <thead> <tr> <th>Code</th> <th>Front Port Rotation</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Standard </td> </tr> <tr> <td>1</td> <td>Reverse Timed Manifold </td> </tr> </tbody> </table>		Code	Front Port Rotation	0	Standard 	1	Reverse Timed Manifold 	<table border="1"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>AAAB</td> <td>No Paint No lackiert</td> </tr> <tr> <td>AAAA</td> <td>Black Paint Schwarz lackiert</td> </tr> </tbody> </table>		Code	Description	AAAB	No Paint No lackiert	AAAA	Black Paint Schwarz lackiert
Code	cm³/U cm³/tr cm³/giro in³/rev																																																												
0140	141 / 8.6																																																												
0170	169 / 10.3																																																												
0195	195 / 11.9																																																												
0240	238 / 14.5																																																												
0280	280 / 17.1																																																												
0310	310 / 18.9																																																												
0335	337 / 20.6																																																												
0405	405 / 24.7																																																												
0475	477 / 29.1																																																												
0530	528 / 32.3																																																												
0625	623 / 38.0																																																												
0785	786 / 48.0																																																												
0960	959 / 58.5																																																												
Code	Shaft																																																												
31*	1 1/2" J501 Taper [†] 																																																												
32	1 1/2" Keyed 																																																												
Code	Mounting/Ports																																																												
AS	Front Mtg/Front Bolting 1/2-13 UNC Thd, 7/8-14 SAE  																																																												
CS	Rear Mtg/Thru Bolting, 7/8-14 SAE  																																																												
Code	Front Port Rotation																																																												
0	Standard 																																																												
1	Reverse Timed Manifold 																																																												
Code	Description																																																												
AAAB	No Paint No lackiert																																																												
AAAA	Black Paint Schwarz lackiert																																																												

For performance data curves, see TH section.

For other available options, see pages 257–258.